

Note: When doing update usb stick needs to be 1GB or less(good quality stick recommended)

## HISTORY INFORMATION FOR THE FOLLOWING MANUAL:

# *Service Procedure for Panel, Board and Software Change / Upgrade*

**ORIGINAL MANUAL ISSUE DATE: 3/2011**

**AZ2 CHASSIS**

<b>Version</b>	<b>Date</b>	<b>Subject</b>
1.0	3/2011	Original manual issue.
2.0	3/2011	Service Manual part number update
3.0	3/2011	Update to Model ID (Appendix 1)

<b>Model</b>	<b>Code</b>	<b>Model</b>	<b>Code</b>
KDL-22EX32x	P-1	KDL-46CX52x	P-2
KDL-24EX32x	P-1	KDL-46EX52x	P-1
KDL-26EX32x	P-1	KDL-46EX72x	3a-2
KDL-32CX52x	P-2	KDL-46HX72x	2b-3
KDL-32EX42x	P-1	KDL-46HX82x	2b-2
KDL-32EX52x	P-1	KDL-46HX92x	2b-1
KDL-32EX72x	3a-2	KDL-46NX72x	3a-1
KDL-37EX52x	P-1	KDL-55EX72x	3a-2
KDL-37EX72x	3a-2	KDL-55HX82x	2b-2
KDL-40CX52x	P-2	KDL-55HX92x	2b-1
KDL-40EX52x	P-1	KDL-55NX72x	3a-1
KDL-40EX72x	3a-2	KDL-60NX72x	3a-1
KDL-40HX72x	2b-3	KDL-65HX92x	2b-1
KDL-40NX72x	3a-1		

**SONY®**

9-883-493-03

Note: When doing update usb stick needs to be 1GB or less(good quality stick recommended)

# *Service Procedure for Panel, Board and Software Change / Upgrade*

*AZ2 CHASSIS*

**SONY®**

9-883-493-03

# READ ME

---

## Notes for Replacing Service Parts for AZ2 Series

- ★ After replacing the **BAT** board, **Panel**, you will need to upgrade Software by using the **USB memory**.  
(Software upgrade required even if replacing the LCD Panel only.)
- ★ Before upgrading Software, **ensure you disconnect all external cables**.
- ★ After upgrading the version, you need to confirm the **SEG**, **DEST**, **MODELNAME**, **SERIAL**, **BU\_TRANS** and **BU\_FLASH** from the Service menu.  
(Incorrect settings affect the set's capabilities.)
- ! ★ When upgrading Software, **be sure to download the most recent version**.  
(If the version of Software already on the repair board is **newer** than the version of Software for upgrade, Software will not be upgraded.)


Note: When doing update usb stick needs to be 1GB or less(good quality stick recommended)

**READ ME**

## Preparing USB for Upgrade

There is no special restriction on USB memory. If you connect the USB memory to the computer and it is recognized on the XMB, you can use it.

The USB memory can be formatted in either **FAT** or **FAT32**.

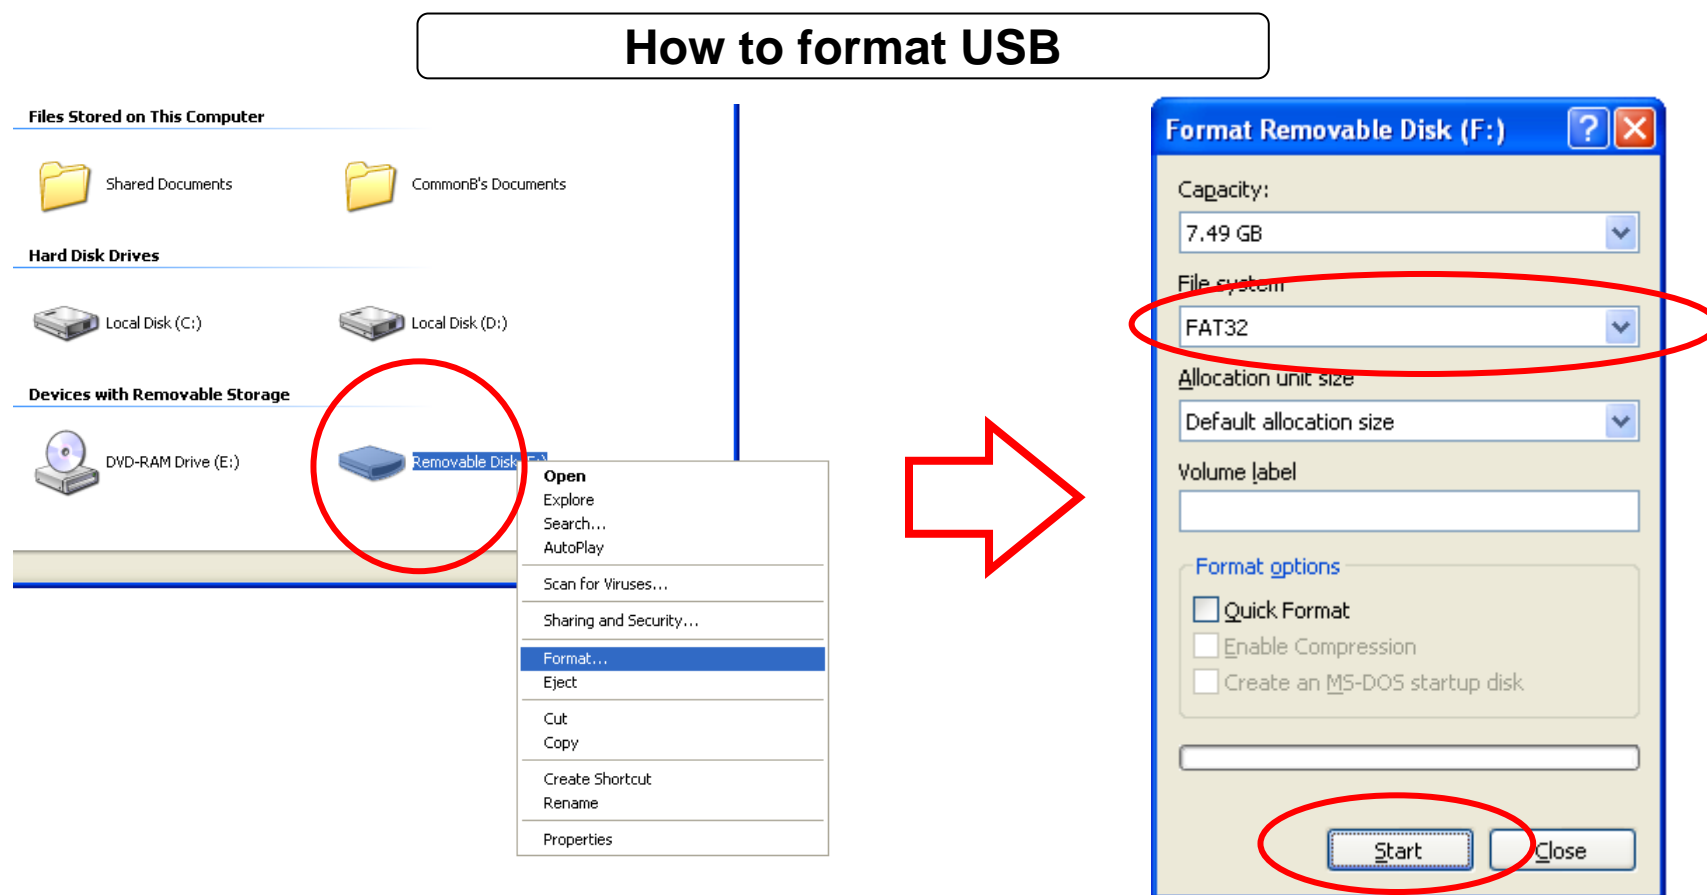

# TABLE OF CONTENTS

---

<b>1. SERVICE BOARD -----</b>	<b>6</b>	<b>2. SERVICE PANEL -----</b>	<b>25</b>
1-1. Steps After Replacing the Service Board		2-1. Steps After Replacing the Service Panel	
1-2. Images Supported by the Service Board		2-2. Preparing USB for Upgrade	
1-3. Preparing USB for Upgrade		2-3. How to Upgrade the Version by Using USB	
1-4. How to Upgrade the Version by Using USB		2-4. Screens Displayed while Upgrading the Version	
1-5. Screens Displayed while Upgrading the Version		2-5. How to Confirm the VPC	
1-6. Confirming the each ID from the Service Menu		2-5-1. How to Change the BU_FLASH	
1-6-1. How to Confirm the SEG		2-5-2. Reconfirming Model_ID/Product_ID/Software_Ver	
1-6-2. How to Change the SEG		2-6. How to Reset the Panel Operation Time	
1-6-3. How to Store Changed Data		2-7. Finish Operation	
1-6-4. How to Change the DEST			
1-6-5. How to Store Changed Data			
1-6-6. How to Change the MODELNAME			
1-6-7. How to Store Changed Data			
1-6-8. How to Change the SERIAL (1/2)			
1-6-9. How to Change the SERIAL (2/2)			
1-6-10. How to Confirm the VPC			
1-6-11. How to Change the BU_TRANS			
1-6-12. Reconfirming Model_ID/Product_ID/Software_Ver			
1-7. Finish Operation			

# SEC.1 SERVICE BOARD

---


## 1-1. Steps After Replacing the Service Board

**Note:** Before operation, disconnect all cables connected to the set.

1. Replace the BAT board.
2. By using the USB memory, upgrade Software.
3. Confirm and specify the following from the Service menu:
  - a. Check and set Digital MENU 002 MODEL, 000 SEG.  
\*Operate [NVM Write (Mute + 0) each setting.
  - b. Check and set Digital MENU 002 MODEL, 001 DEST.  
\*Operate [NVM Write (Mute + 0) each setting.
  - c. Check and set Digital MENU 002 MODEL, 002 MODELNAME.  
\*Operate [NVM Write (Mute + 0) each setting.
  - d. Check and set Digital MENU 002 MODEL, 003 SERIAL.  
\*Operate [Decision (12/Enter/Select) after setting.
  - e. Set VPC MENU 000 DATA\_COPY, 000 BU\_TRANS.
  - f. Check Model\_ID, Product\_ID and Software Version from Digital MENU.
4. Conclude the operation.

## 1-2. Images Supported by the Service Board

<Example> BAT Board (KDL-\*\*EX720 Series)

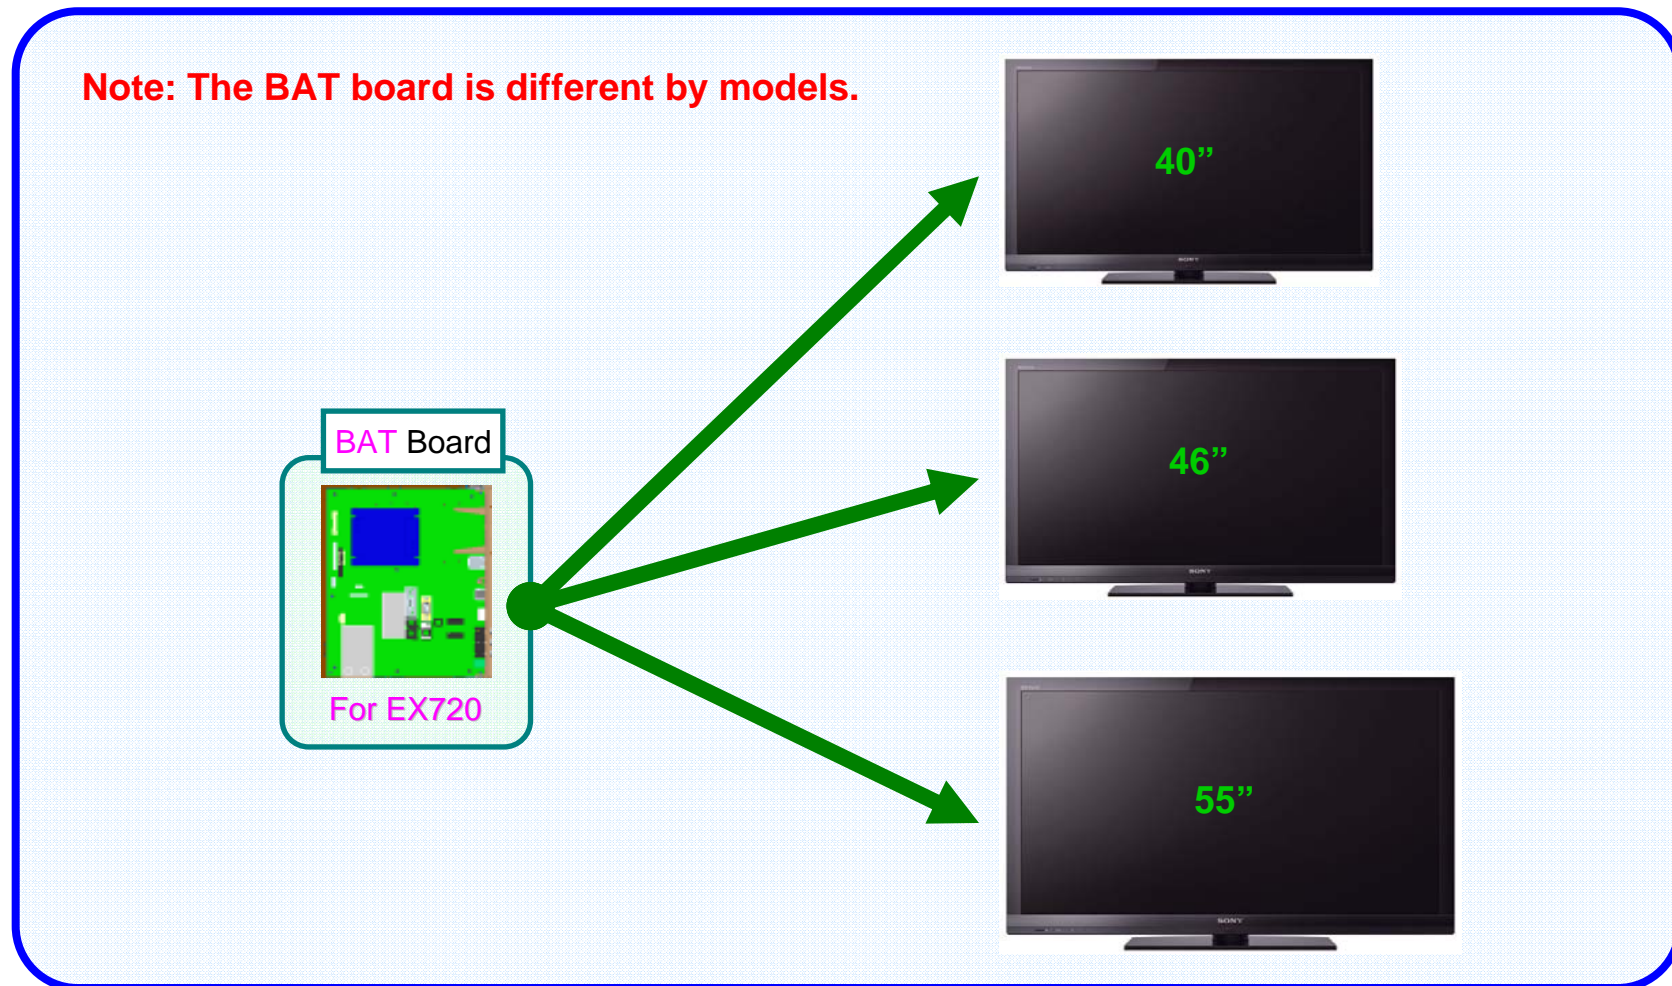

Note: When doing update usb stick needs to be 1GB or less(good quality stick recommended)


### 1-3. Preparing USB for Upgrade

#### [Making procedure]

1. Get the tvupdate file for upgrade.
2. Extract tvupdate file. (e.g. sony\_tvupdate\_2011\_2037\_\*\*\*\_auth)
3. Confirm folder name. (e.g. sony\_dtv0FA10A01A0A1\_00000202)
4. Copy the folder under root directory of USB device.

\*\*\* may differ depending on destination.\*\*\*

Note: The upgrade will not be performed if the folder structure, name of the folder, or name of the file inside the folder is modified.

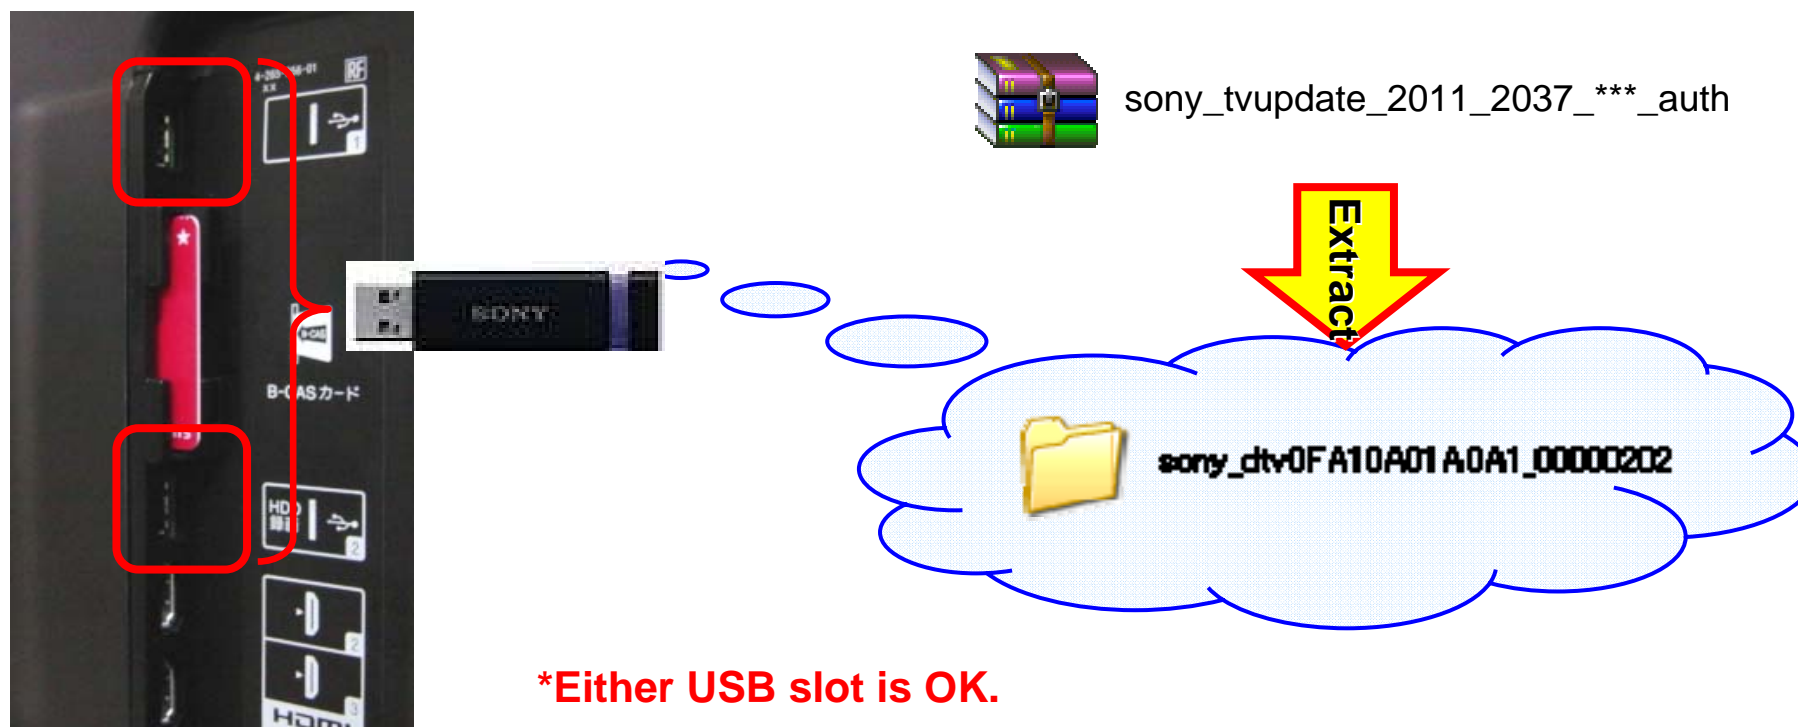

\*Either USB slot is OK.



## **1-4. How to Upgrade the Version by Using USB**

### **[Steps for upgrading the version]**

1. When you turn on the set after replacing the BAT board, the green LED and amber LED may blink (Usually if no image and sound are generated) – this is not a problem.

1.1. Insert USB for upgrade into the USB slot on the set while the set is turned on.

**Note: Please power on by the power button of TV or remote commander within 5 seconds if TV goes to standby when inserting the AC plug.**

2. After inserting USB, the green LED and amber LED will blink for a while.

2.1. The set will reset about a minute later, and then the Standby LED lights and the Communication LED blinks.


**Note: After replacing the BAT board, the upgrade startup screen may not be displayed. In addition, be sure **not** to remove USB while it is writing.**

3. After the writing is complete, the set is rebooted and the screen indicating the upgrade is complete is displayed. Remove USB from the set and press the “Enter” button while the set is turned on.


## 1-5. Screens Displayed while Upgrading the Version

When the **green LED** and **amber LED** are blinking, insert USB into the set, after about 30 seconds the set is rebooted. Then, the **Standby LED** lights and the **Timer LED** blinks. After about 3 minutes, the set is rebooted and is turned on. After a while, a completion message is displayed.

### Upgrading...

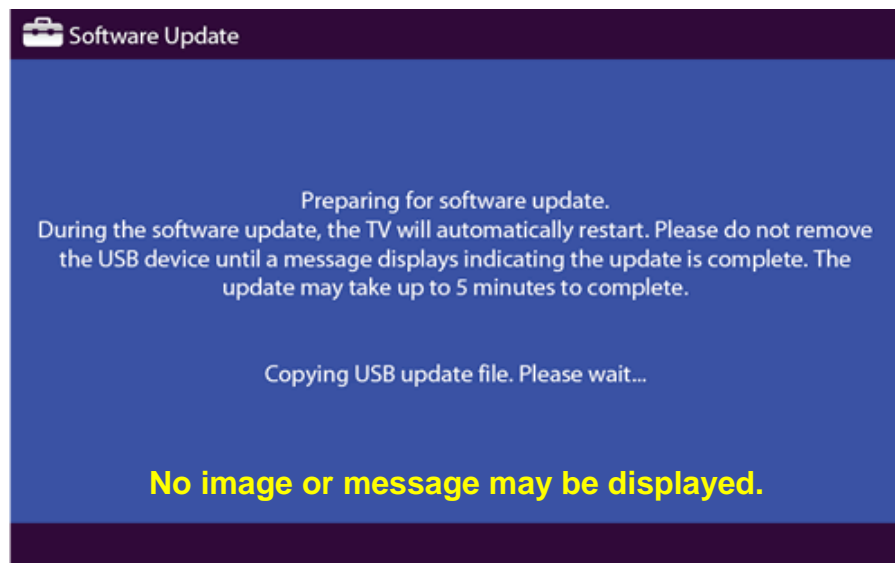

### Upgrade is complete.

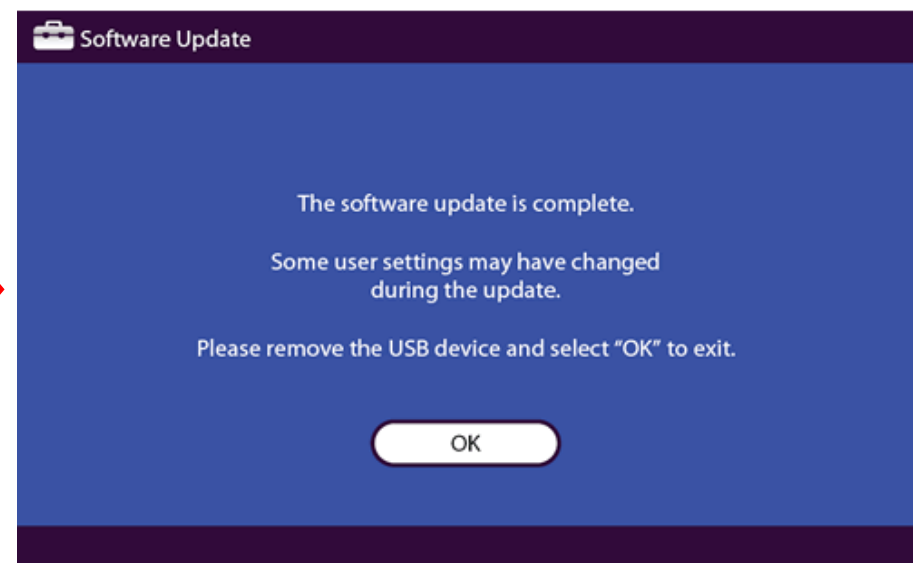

**If USB is left inserted, a message like above is displayed. If so, remove USB.**

### 1-6. Confirming the each ID from the Service Menu

While in standby mode – Press “DISPLAY(1) -> 5ch(2) -> Vol+(3) -> POWER ON(4)” on the remote commander.

Confirm the Model ID and Product ID from the Service menu.


Note: You are advised to see the annexed paper to confirm the Model ID and Product ID.



Remote Commander

Model ID

Product ID

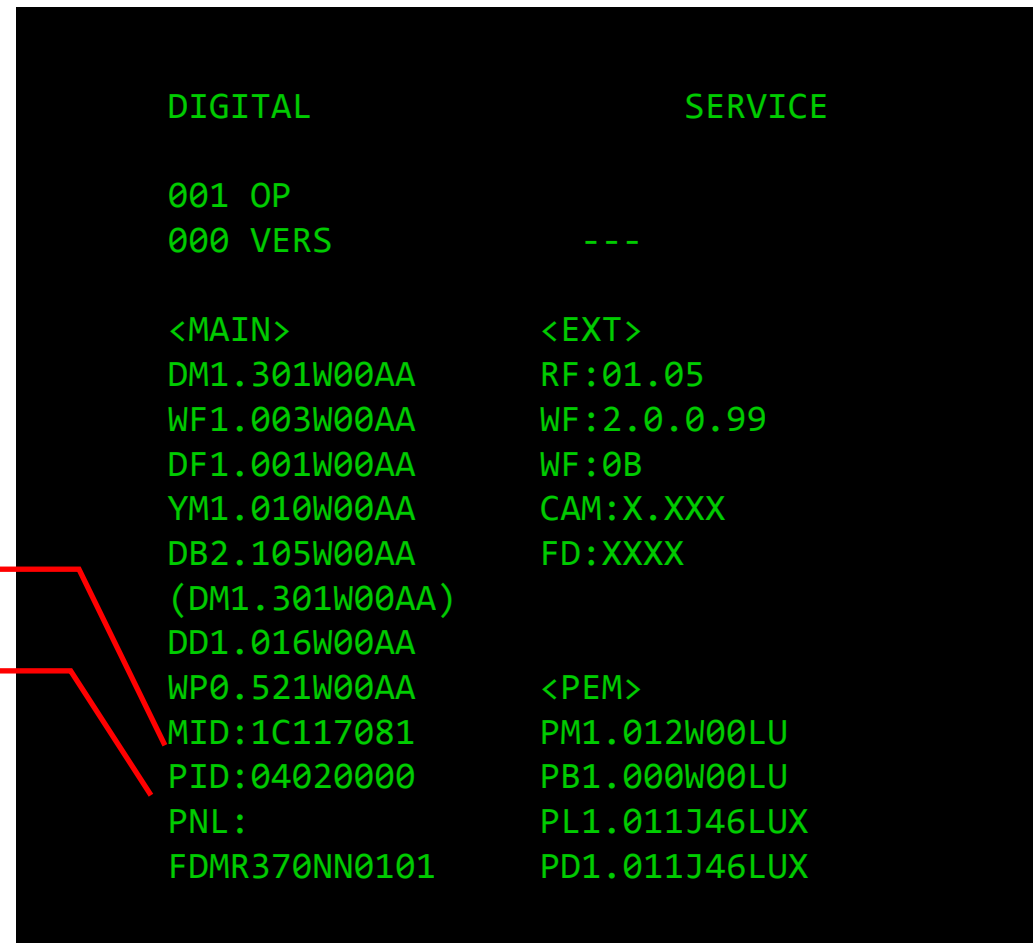

Digital Service menu


### 1-6-1. How to Confirm the SEG

1. Press the OPTIONS key to go from the Service menu to the Digital menu.
2. Press the OPTIONS key to toggle in the following order:



“DIGITAL” -> “CHASSIS” -> “VPC”



OPTIONS

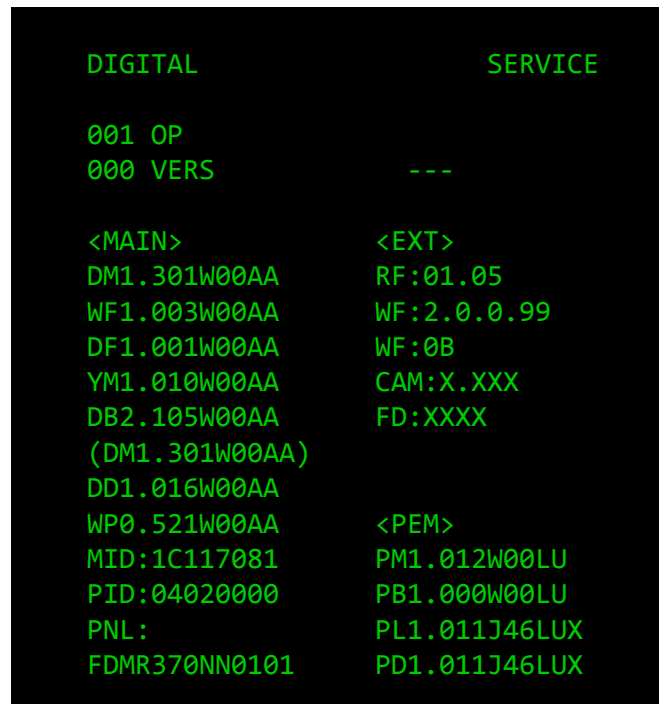

Digital Service menu

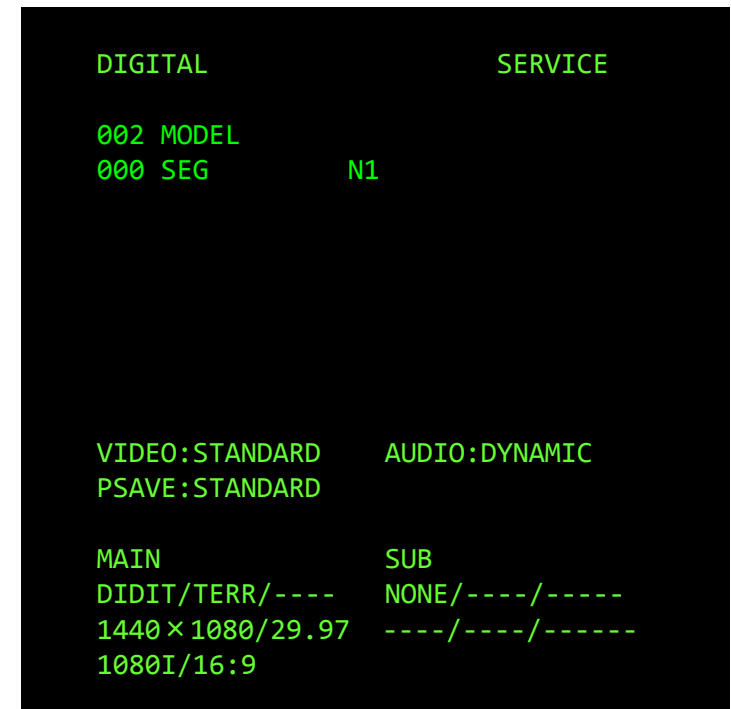

Digital Service menu

Remote Commander

## 1-6-2. How to Change the SEG


### [To change SEG of DIGITAL]

- Press the “2/5” key on the remote commander to select 002 MODEL.
- Press the “1/4” key on the remote commander to select 000 SEG.
- Press the “3/6” key on the remote commander to select SEGMENT from the cross-reference table.



Remote Commander

Press 2: increment  
Press 5: decrement

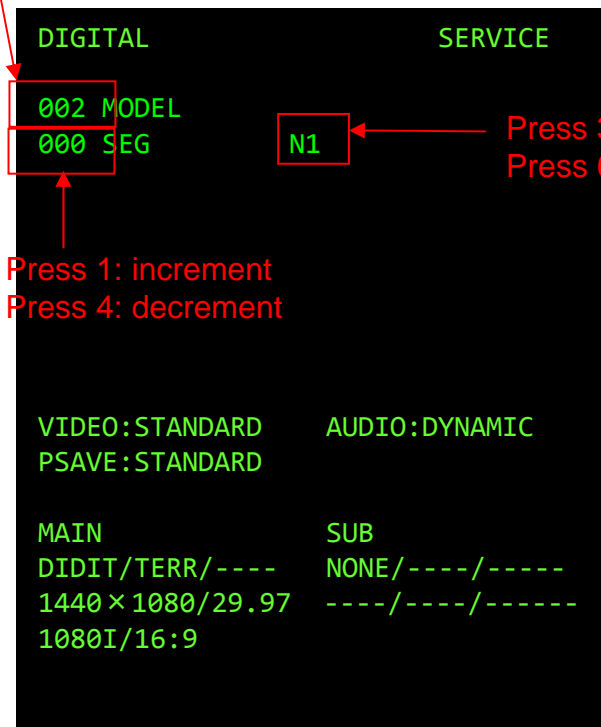

Digital Service menu

SEG	Model Name
Y1	KDL-**HX92*
Y2	KDL-**HX82*
Y3	KDL-**HX72*
N1	KDL-**NX72*
N4/N5	KDL-**EX72*
I1/I2	KDL-**EX32*/42*/52*
I4	KDL-**CX52*


The SEG and model names may differ depend on the destination (See Appendix 1 for correct segment).

### 1-6-3. How to Store Changed Data

[To store data changed in “DIGITAL”]

- a. Press “MUTING” on the remote commander.
- b. Press “0” on the remote commander.  
 “Write” displayed in red on the screen is changed to “Done” displayed in green.


Note: If the indication mentioned above is displayed, the store is finished.

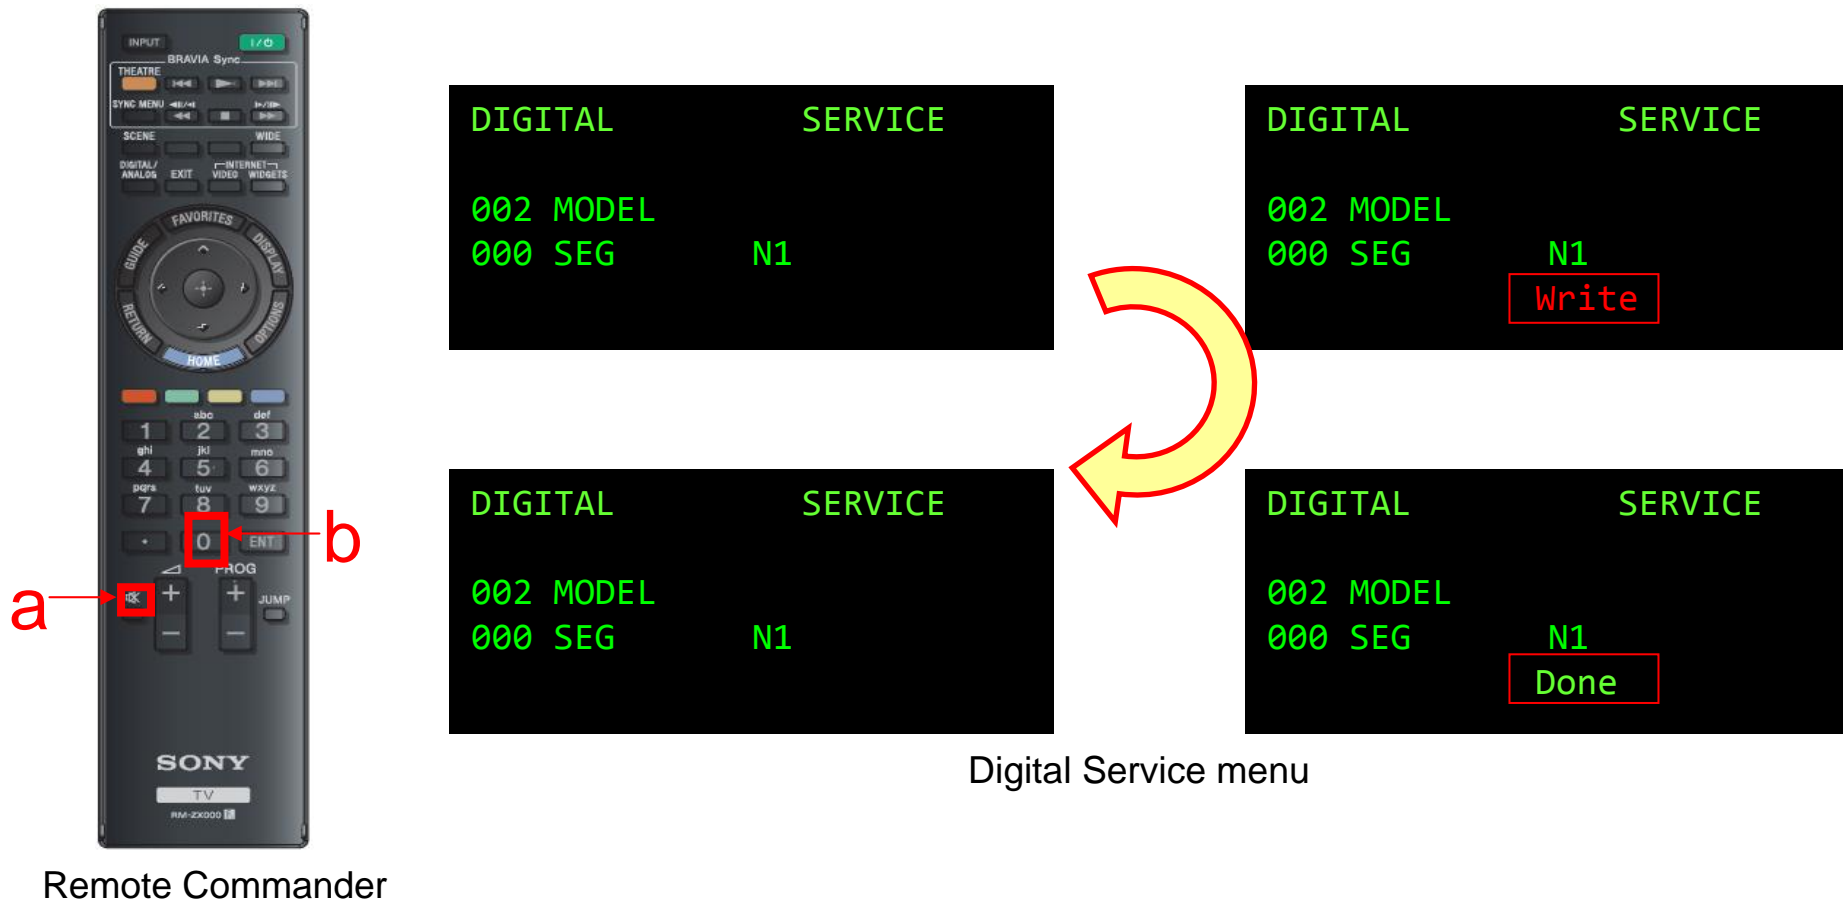

### 1-6-4. How to Change the DEST

**[To change DEST of DIGITAL]**

- Press the “2/5” key on the remote commander to select 002 MODEL.
- Press the “1/4” key on the remote commander to select 001 DEST.
- Press the “3/6” key on the remote commander to select DESTINATION from the cross-reference table.

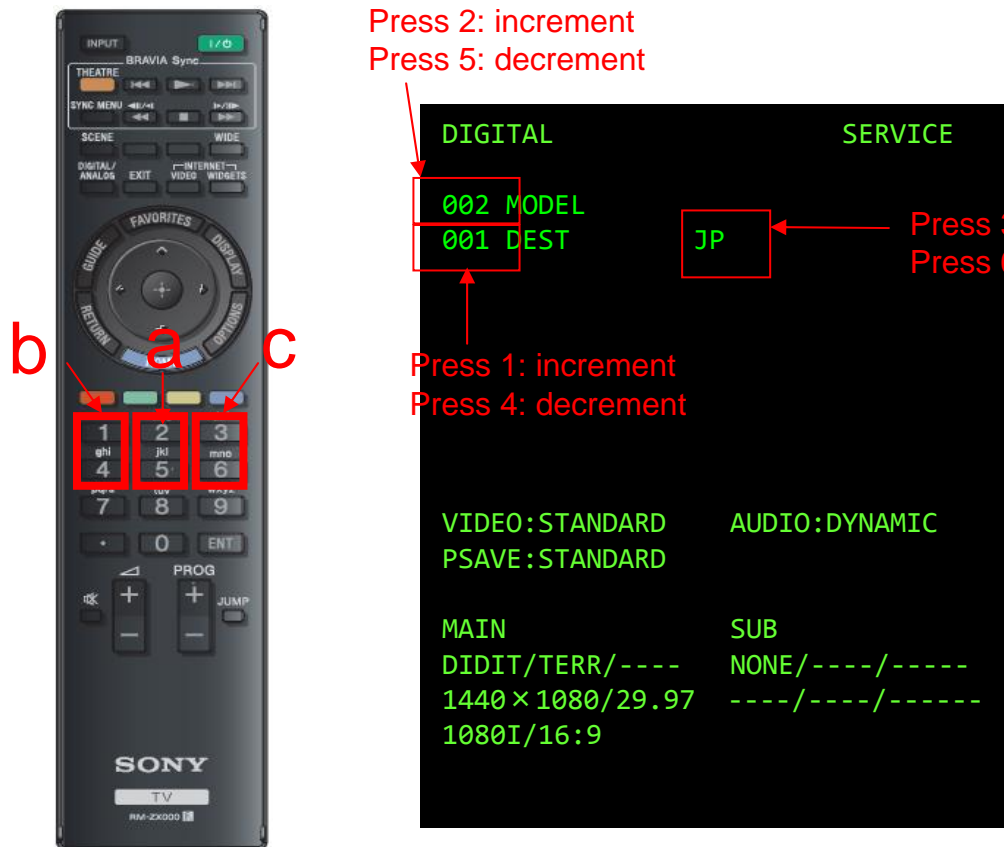

Remote Commander

Digital Service menu

Destination	Comment	Reception
AEP	All Europe	Standard
AEP-S	All Europe	Satellite
AEP-T2	Europe (UK)	Digital HD Terrestrial
AEP-N-STD	N/A	Standard
AEP-N-S	N/A	Satellite
AEP-MHP	Italy	Standard
AEP-S-MHP	Italy	Satellite


*Note: Please check Appendix 2 for KDL-XXEX72x series*

### 1-6-5. How to Store Changed Data

[To store data changed in “DIGITAL”]

- a. Press “MUTING” on the remote commander.
- b. Press “0” on the remote commander.  
 “Write” displayed in red on the screen is changed to “Done” displayed in green.

Note: If the indication mentioned above is displayed, the store is finished.

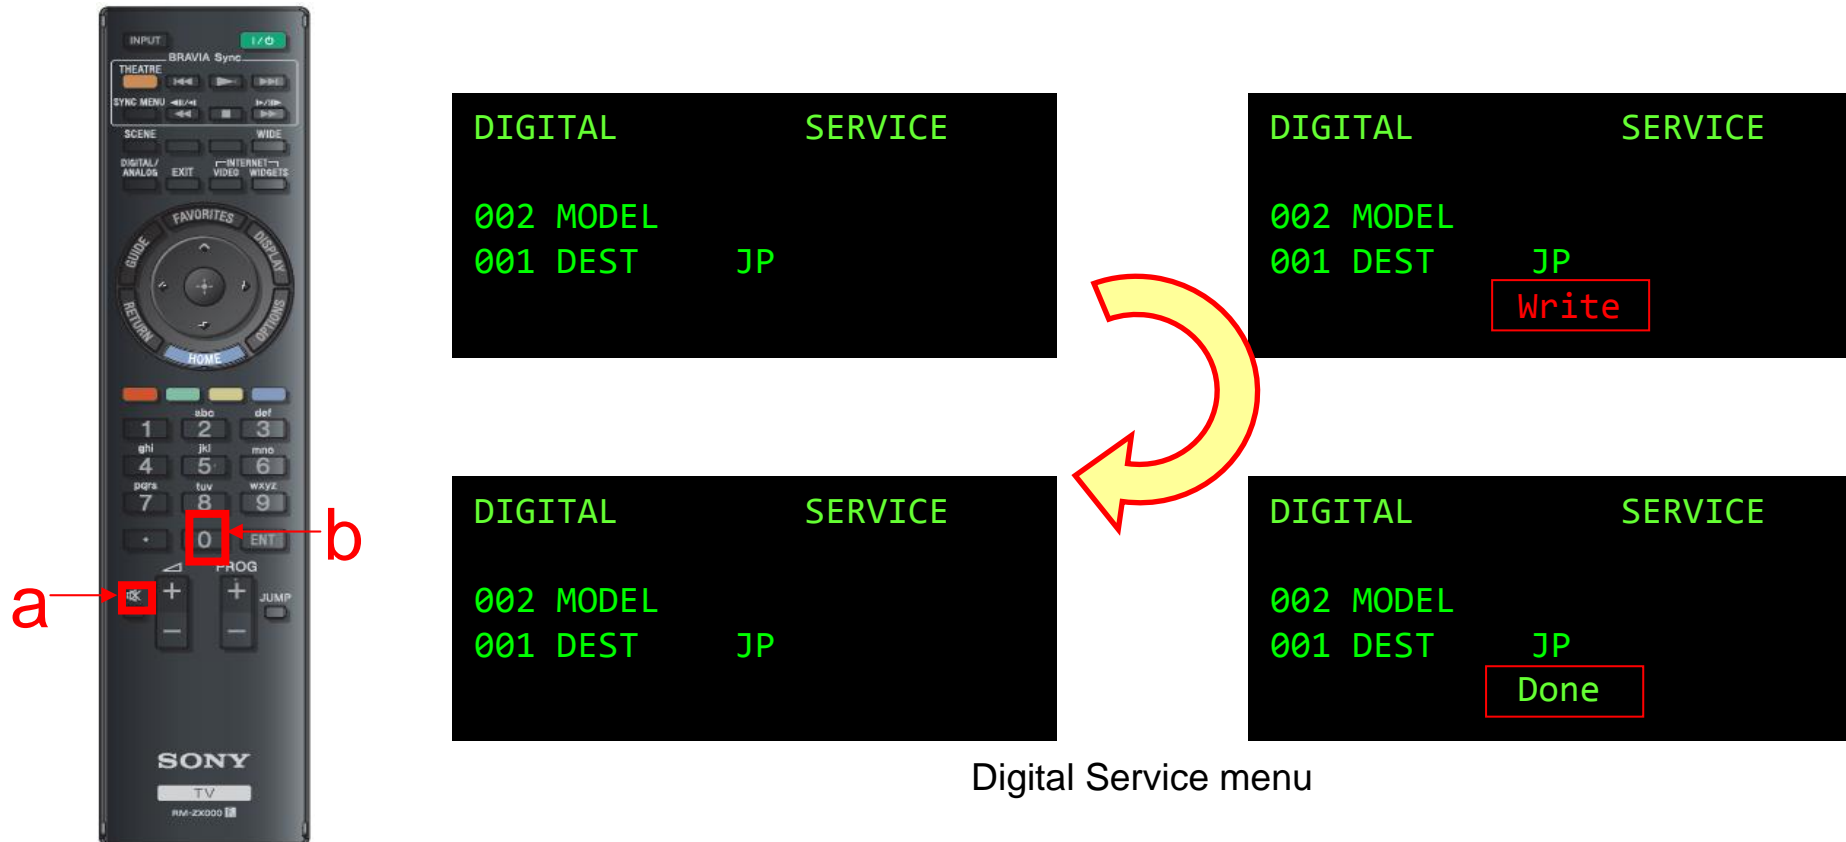

Remote Commander

Digital Service menu




## 1-6-6. How to Change the MODELNAME

### [To change MODELNAME of DIGITAL]

- Press the “2/5” key on the remote commander to select 002 MODEL.
- Press the “1/4” key on the remote commander to select 002 MODELNAME.
- Press the “3/6” key on the remote commander to select MODELNAME from the cross-reference table.



Press 2: increment  
Press 5: decrement

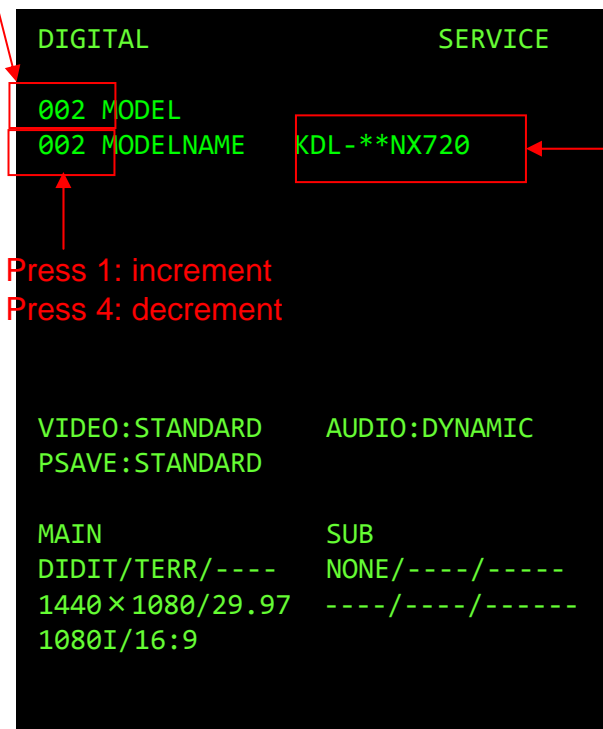

Press 3: increment  
Press 6: decrement

Press 1: increment  
Press 4: decrement

SEG	Model Name
Y1	KDL-**HX92*
Y2	KDL-**HX82*
Y3	KDL-**HX72*
N1	KDL-**NX72*
N4/N5	KDL-**EX72*
I1/I2	KDL-**EX32*/42*/52*
I4	KDL-**CX52*

The SEG and model names may differ depend on the destination.

Remote Commander


Digital Service menu

### 1-6-7. How to Store Changed Data

[To store data changed in “DIGITAL”]

- a. Press “MUTING” on the remote commander.
- b. Press “0” on the remote commander.  
“Write” displayed in red on the screen is changed to “Done” displayed in green.

Note: If the indication mentioned above is displayed, the store is finished.

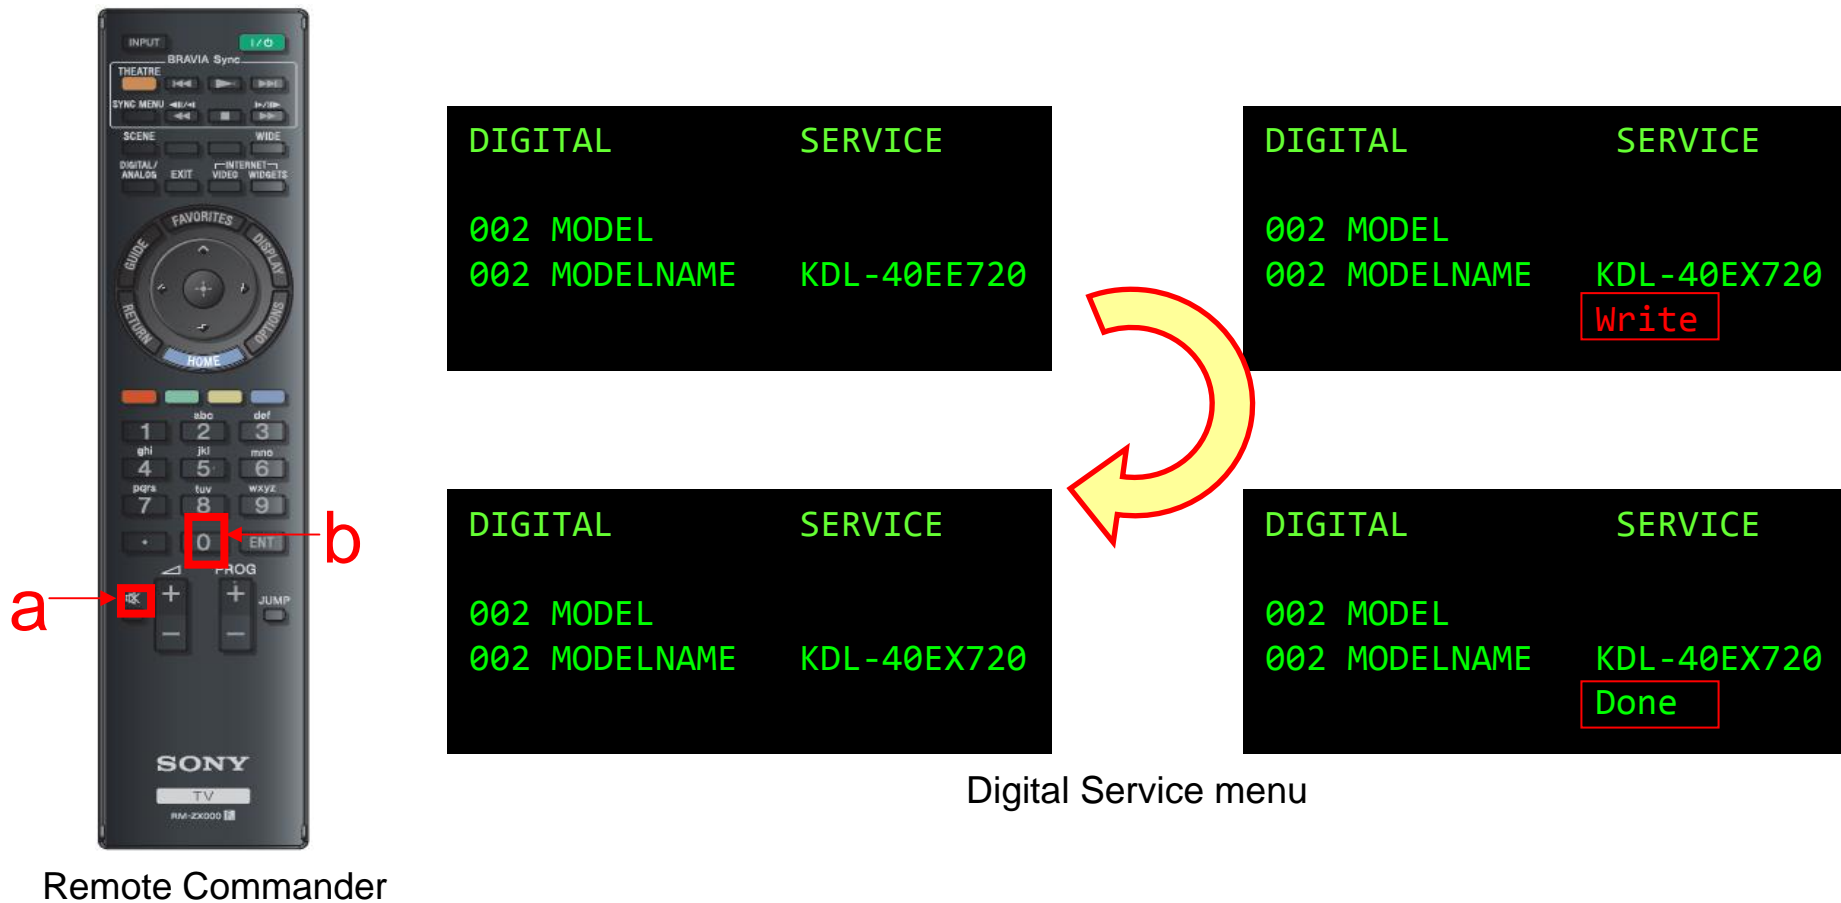

### 1-6-8. How to Change the SERIAL (1/2)


**[To change DEST of DIGITAL]**

- a. Press the “2/5” key on the remote commander to select 002 MODEL.
- b. Press the “1/4” key on the remote commander to select 003 SERIAL.
- c. Press the “0” key on the remote commander to moved store page.





Remote Commander

Press 2: increment  
Press 5: decrement

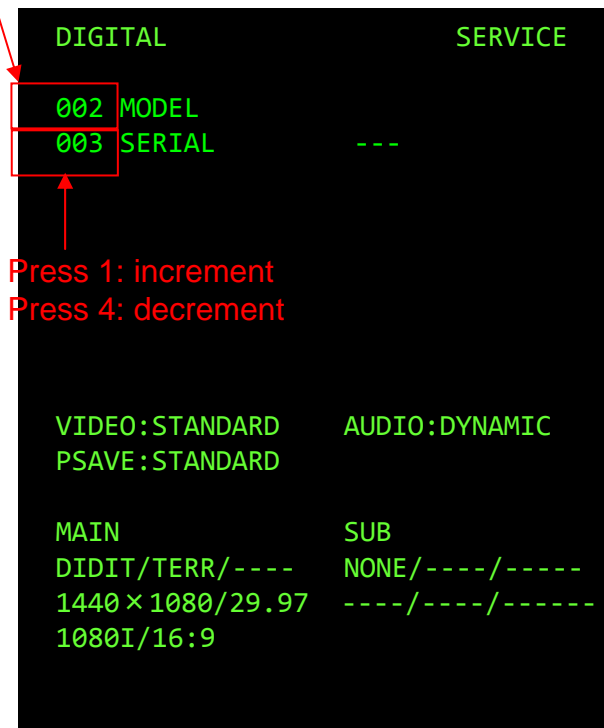

Press 1: increment  
Press 4: decrement

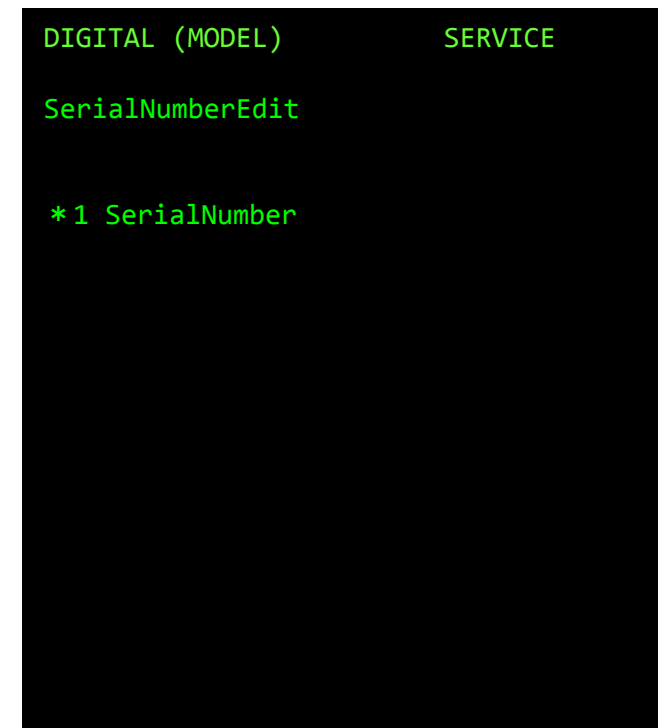


Digital Service menu


## 1-6-9. How to Change the SERIAL (2/2)

### [To change DEST of DIGITAL]

- a. Press the “1” key on the remote commander to select SerialNumberEdit.
- b. Using the number keys on the remote commander set SERIAL Number.
- c. Press the “ENT” or “+”(Select) key on the remote commander to store the information.

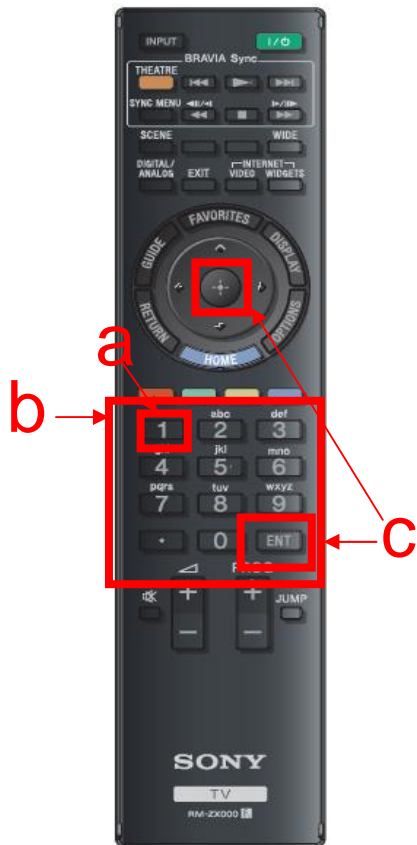

Remote Commander

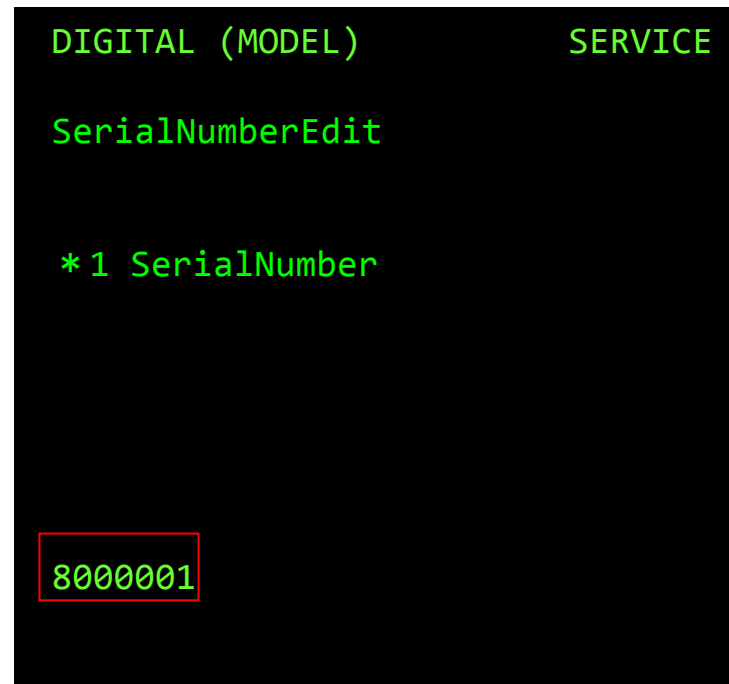

Digital Service menu


Please input the SERIAL Number of the TV.  
\*Storing is only once.

### 1-6-10. How to Confirm the VPC



1. Press the OPTIONS key to go from the Service menu to the VPC menu.
2. Press the OPTIONS key to toggle in the following order:  
 “DIGITAL” -> “CHASSIS” -> “VPC”



OPTIONS

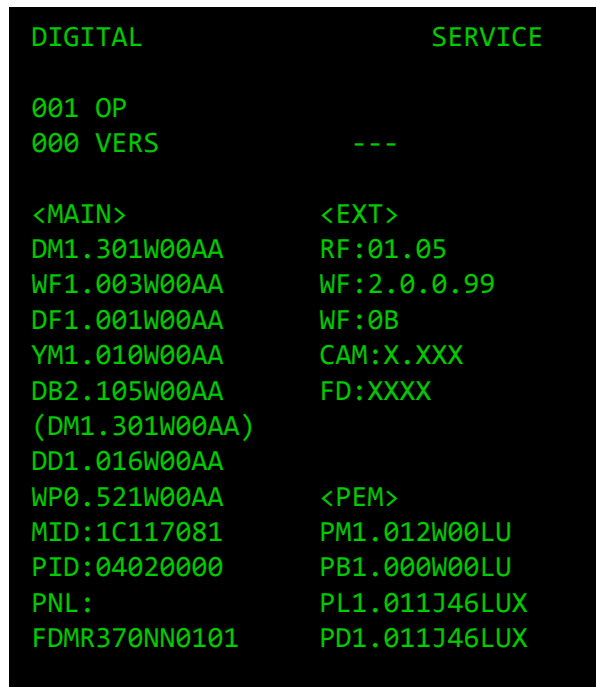

Digital Service menu

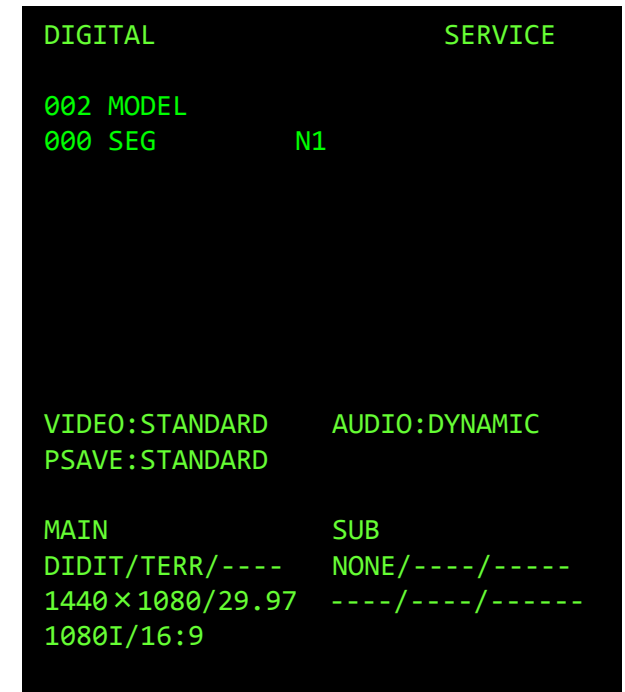

Digital Service menu

Remote Commander

### 1-6-11. How to Change the BU\_TRANS

[To BU\_TRANS of VPC]

- Press the “2/5” key on the remote commander to select 000 DATA\_COPY.
- Press the “1/4” key on the remote commander to select 000 DATA\_TRANS\_SET.
- Press the “3/6” key on the remote commander to select from 0 to 1.



Remote Commander


Press 2: increment  
Press 5: decrement

Press 3: increment  
Press 6: decrement

Press 1: increment  
Press 4: decrement

VPC Service menu

NG



VPC SERVICE  
000 DATA\_COPY  
000 BU\_TRANS 2

DATA TRANSFER NG

OK

VPC SERVICE  
000 DATA\_COPY  
000 BU\_TRANS 3

DATA TRANSFER SUCCESS

**Note: This procedure is required to copy W/B adjustment DATA in the T-con board to BAT board.**

**Note: All models except segment Code "I" (i.e. I1, I2 and I4) require this adjustment (see Appendix list).**

### 1-6-12. Reconfirming Model\_ID/Product\_ID/Software\_Ver

1. At the time of standby “DISPLAY(1) -> 5ch(2) -> Vol+(3) -> POWER ON(4)” on the remote commander.
2. Confirm the Model ID, Product ID, and Software Version from the Service menu.

Note: You are advised to see the annexed paper to confirm the Model ID and Product ID.

Remote Commander

Digital Service menu

## 1-7. Finish Operation

**The upgrade process is complete and unplug the AC cord**

**Warning Note:**

**\*Because the ID for identifying the device is installed on the BAT board of FTV, never attempt to mount the BAT board removed from a customer's set onto another set. (The ID information is used in BIV-IPTV or NDD.)**

**\*In addition, BAT board reuse in unauthorized way is also prohibited. When use external HDD for USB, cannot play recorded contents.**

**Note: In the worst case it may lead to legal action.**



## SEC.2 SERVICE PANEL

---

### 2-1. Steps After Replacing the Service Panel

**Note:** Before operation, disconnect all cables connected to the set.

1. Replace the Service Panel.
2. Confirm and change the following from the Service menu:
  - a. Change VPC MENU 001 DATA\_BUCKUP , 000 BU\_FLASH.
  - b. Confirm Model\_ID , Product\_ID , Software Version from DIGITAL menu.
3. Reset the Panel Operation Time from the Service menu.
4. Conclude the operation.


## 2-2. Preparing USB for Upgrade

### [Making procedure]

1. Get the tvupdate file for upgrade.
2. Extract tvupdate file. (e.g. sony\_tvupdate\_2011\_2037\_\*\*\*\_auth)
3. Confirm folder name. (e.g. sony\_dtv0FA10A01A0A1\_00000202)
4. Copy the folder under root directory of USB device.

\*\*\* may differ depend on the destination.

**Note: The upgrade will not be performed if the folder structure, name of the folder, or name of the file inside the folder is modified.**

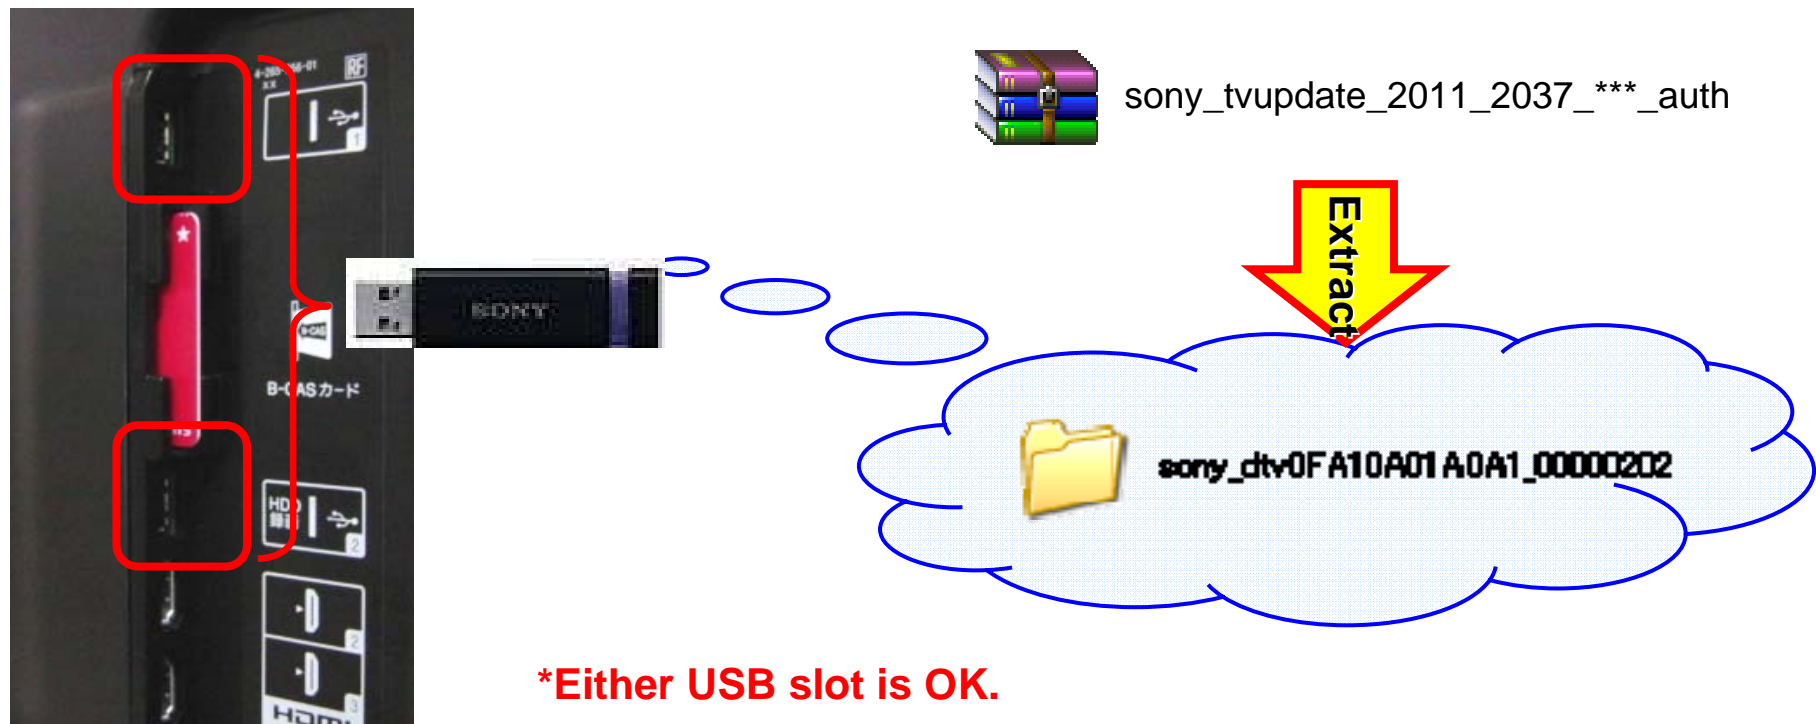

**\*Either USB slot is OK.**

## 2-3. How to Upgrade the Version by Using USB

### [Steps for upgrading the version]

1. When you turn on the set after replacing the BAT board, the green LED and amber LED may blink (Usually if no image and sound are generated) – This is not a problem.

1.1. Even so, insert USB for upgrade into the USB slot on the set while the set is turned on.

**Note:** Please power on by the power button of TV or remote commander within 5 seconds if TV is go to standby when inserting the AC plug.

2. After inserting USB, the green LED and amber LED blink for a while. The set will be reset about a minute later, and then the Standby LED lights and the Communication LED blinks.


**Note:** After replacing the BAT board, the upgrade startup screen may not be displayed. In addition, be sure ***not*** to remove USB while it is writing.

3. After the writing is complete, the set is rebooted and the screen indicating the upgrade is complete is displayed. Remove USB from the set and press the “Enter” button while the set is turned on.


## 2-4. Screens Displayed while Upgrading the Version

When the **green LED** and **amber LED** blink, insert USB into the set, and after about 30 seconds the set is rebooted. Then, the **Standby LED** lights and the **Timer LED** blinks. After about 3 minutes, the set is rebooted and is turned on. After a while, a completion message is displayed.

### Upgrading...

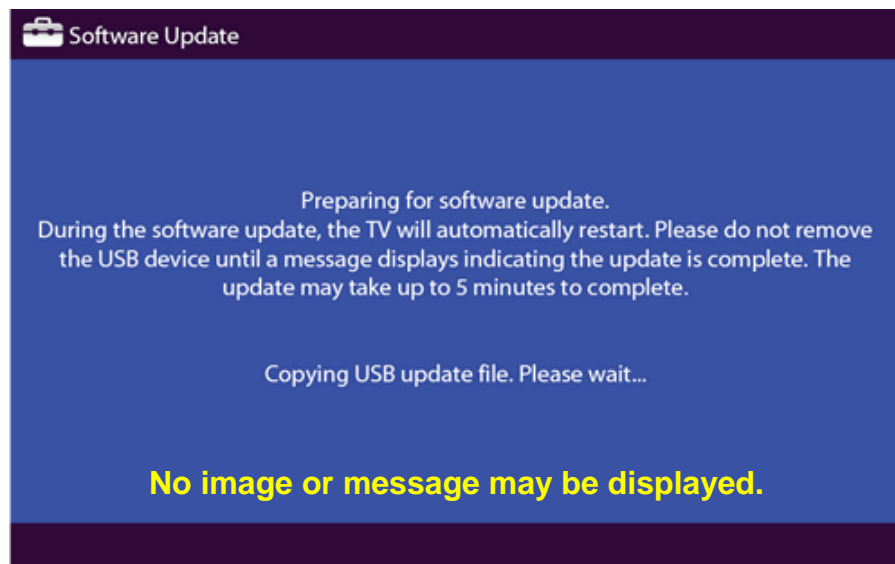

### Upgrade is complete.

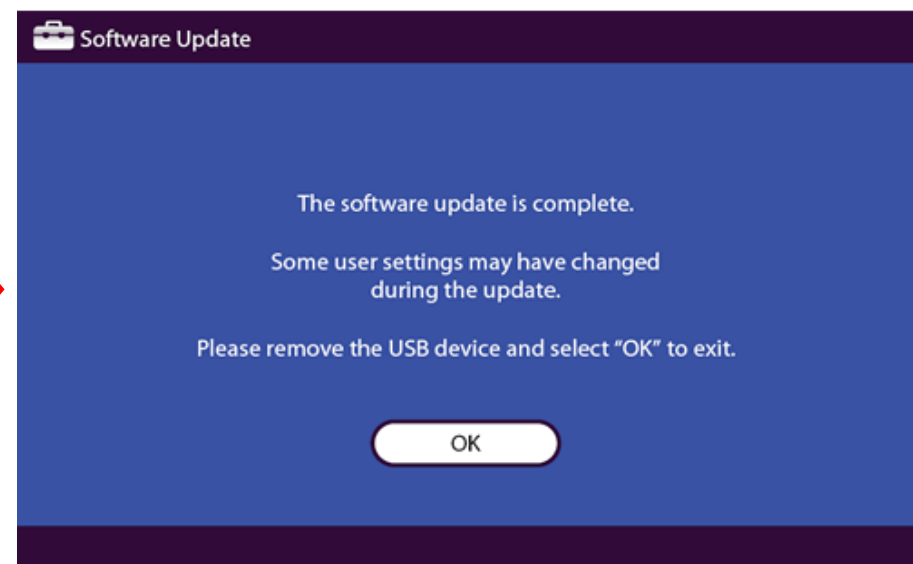

**If USB is left inserted, a message like above is displayed. If so, remove USB.**

## 2-5. How to Confirm the VPC

1. Press the OPTIONS key to go from the Service menu to the VPC menu.
2. Press the OPTIONS key to toggle in the following order:  
 “DIGITAL” -> “CHASSIS” -> “VPC”




OPTIONS

```

DIGITAL                SERVICE
001 OP
000 VERS                ---

<MAIN>                 <EXT>
DM1.301W00AA          RF:01.05
WF1.003W00AA          WF:2.0.0.99
DF1.001W00AA          WF:0B
YM1.010W00AA          CAM:X.XXX
DB2.105W00AA          FD:XXXX
(DM1.301W00AA)
DD1.016W00AA
WP0.521W00AA          <PEM>
MID:1C117081          PM1.012W00LU
PID:04020000          PB1.000W00LU
PNL:                  PL1.011J46LUX
FDMR370NN0101        PD1.011J46LUX
    
```

Digital Service menu



```

VPC    SERVICE
000    DATA_COPY
000    BU_TRANS      0
    
```

VPC Service menu

Remote Commander

## 2-5-1. How to Change the BU\_FLASH


[To BU\_FLASH of VPC]

- Press the “2/5” key on the remote commander to select 001 DATA\_BUCKUP.
- Press the “1/4” key on the remote commander to select 000 DATA\_FLASH.
- Press the “3/6” key on the remote commander to select from 0 to 1.




Press 2: increment  
Press 5: decrement

Press 3: increment  
Press 6: decrement


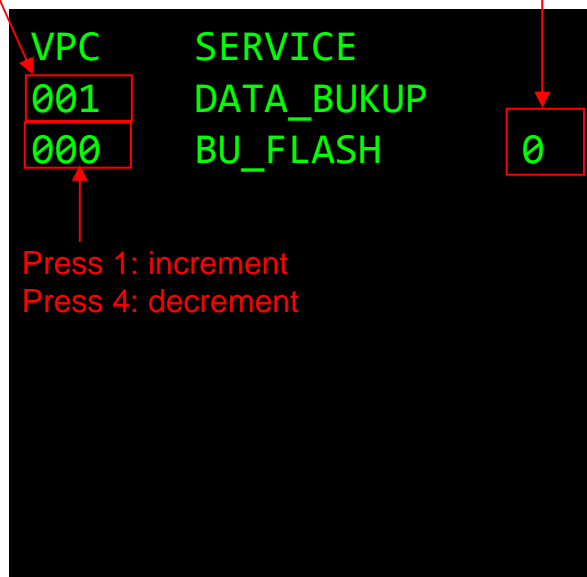


Press 1: increment  
Press 4: decrement

NG



OK

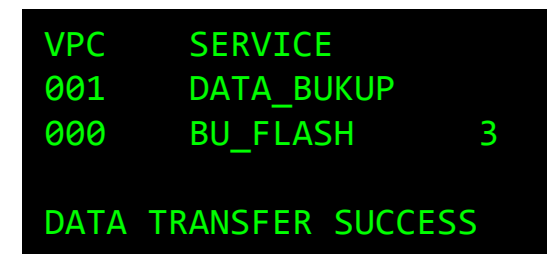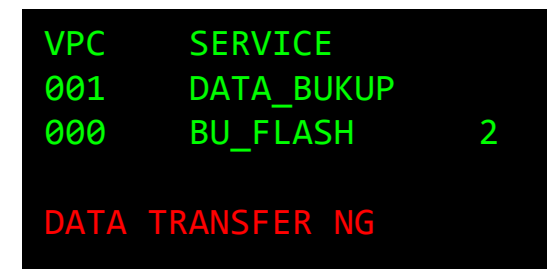

VPC Service menu

**Note: This procedure is to copy W/B adjustment DATA in the T-con board to BAT board.**

**Note: All models except segment Code "I" (i.e. I1, I2 and I4) require this adjustment**

## 2-5-2. Reconfirming Model\_ID/Product\_ID/Software\_Ver

1. At the time of standby “DISPLAY(1) -> 5ch(2) -> Vol+(3) -> POWER ON(4)” on the remote commander.
2. Confirm the Model ID, Product ID, and Software Version from the Service menu.

Note: You are advised to see the annexed paper to confirm the Model ID and Product ID.

The diagram illustrates the steps to access the service menu. On the left, a Sony remote commander is shown with four red boxes and arrows indicating the sequence of button presses: 1. The DISPLAY button, 2. The 5 button, 3. The Vol+ button, and 4. The Power On button. On the right, a screenshot of the Digital Service menu is shown with three red boxes and arrows pointing to specific lines: Software Version (000 VERS), Model ID (DM1.301W00AA), and Product ID (FDMR370NN010).


DIGITAL	SERVICE
001 OP	
000 VERS	---
<MAIN>	<EXT>
DM1.301W00AA	RF:01.05
WF1.003W00AA	WF:2.0.0.99
DF1.001W00AA	WF:0B
YM1.010W00AA	CAM:X.XXX
DB2.105W00AA	FD:XXXX
(DM1.301W00AA)	
DD1.016W00AA	
WP0.521W00AA	<PEM>
MID:1C117081	PM1.012W00LU
PID:04020000	PB1.000W00LU
PNL:	PL1.011J46LUX
FDMR370NN010	PD1.011J46LUX

## 2-6. How to Reset the Panel Operation Time

1. At the time of standby “DISPLAY -> 5ch -> Vol+ -> POWER ON” on the remote commander.
2. Press “7” -> “0” on the remote commander.
3. Confirm that the panel operation time is displayed as “00000”.



Remote Commander

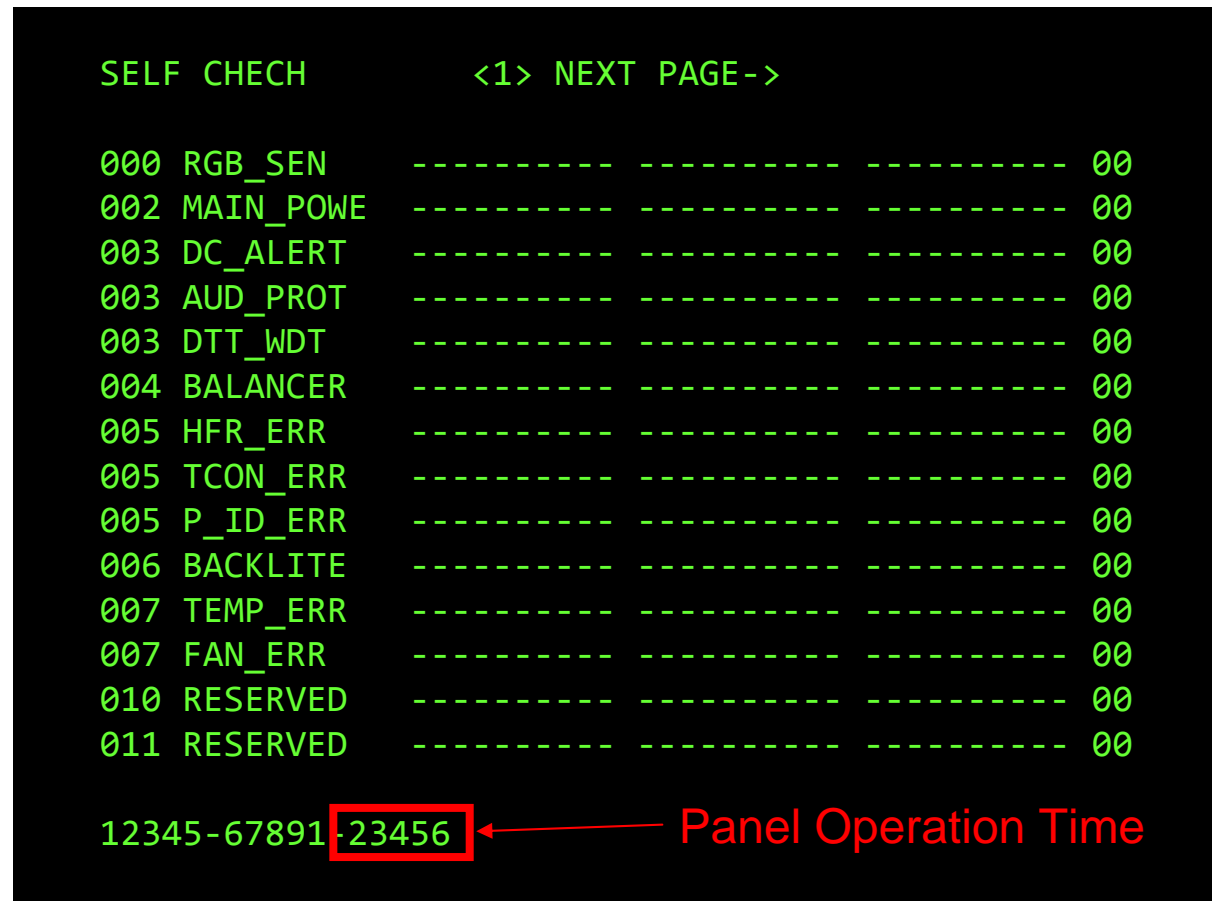

Diagnosis Display



## **2-7. Finish Operation**

**The upgrade process is complete and unplug the AC cord**

**END**

---

## Appendix 1 - Model ID / Product ID and Panel Information

Model Name	ProductCode	Model-ID	Product-ID	Panel Name	000 SEG	001 DEST	PKG
KDL-22EX320	P18356100	0xdd95e32f	0x03150000	LC216EXN-SDA2	I2	AEP	EUA
KDL-22EX320	P18356101	0xdd95e32f	0x03150000	LC216EXN-SDA2	I2	AEP	EUA
KDL-22EX320	P18409103	0xdd95e32f	0x03150000	LC216EXN-SDA2	I2	AEP	EUA
KDL-22EX320	P18360400	0xdd95e32f	0x0d150000	LC216EXN-SDA2	I2	AEP-MHP	EIA
KDL-22EX325	P18367300	0xdd95e42f	0x04150000	LC216EXN-SDA2	I2	AEP-S	EUA
KDL-24EX320	P18355900	0xdd95e32e	0x03150000	T240HW01 V0	I2	AEP	EUA
KDL-24EX320	P18355901	0xdd95e32e	0x03150000	T240HW01 V0	I2	AEP	EUA
KDL-24EX320	P18355910	0xdd95e32e	0x03150000	T240HW01 V0	I2	AEP	EUA
KDL-24EX320	P18355911	0xdd95e32e	0x03150000	T240HW01 V0	I2	AEP	EUA
KDL-24EX320	P18408903	0xdd95e32e	0x03150000	T240HW01 V0	I2	AEP	EUA
KDL-24EX320	P18408913	0xdd95e32e	0x03150000	T240HW01 V0	I2	AEP	EUA
KDL-24EX320	P18360200	0xdd95e32e	0x0d150000	T240HW01 V0	I2	AEP-MHP	EIA
KDL-24EX320	P18360210	0xdd95e32e	0x0d150000	T240HW01 V0	I2	AEP-MHP	EIA
KDL-24EX320	P18355900	0xdd95e34f	0x03150000	T240HW01 V02	I2	AEP	EUA
KDL-24EX320	P18355901	0xdd95e34f	0x03150000	T240HW01 V02	I2	AEP	EUA
KDL-24EX320	P18355910	0xdd95e34f	0x03150000	T240HW01 V02	I2	AEP	EUA
KDL-24EX320	P18355911	0xdd95e34f	0x03150000	T240HW01 V02	I2	AEP	EUA
KDL-24EX320	P18408903	0xdd95e34f	0x03150000	T240HW01 V02	I2	AEP	EUA
KDL-24EX320	P18408913	0xdd95e34f	0x03150000	T240HW01 V02	I2	AEP	EUA
KDL-24EX320	P18360200	0xdd95e34f	0x0d150000	T240HW01 V02	I2	AEP-MHP	EIA
KDL-24EX320	P18360210	0xdd95e34f	0x0d150000	T240HW01 V02	I2	AEP-MHP	EIA
KDL-24EX325	P18367100	0xdd95e42e	0x04150000	T240HW01 V0	I2	AEP-S	EUA
KDL-24EX325	P18367110	0xdd95e42e	0x04150000	T240HW01 V0	I2	AEP-S	EUA
KDL-24EX325	P18367105	0xdd95e42e	0x04150000	T240HW01 V0	I2	AEP-S	EUA
KDL-24EX325	P18367115	0xdd95e42e	0x04150000	T240HW01 V0	I2	AEP-S	EUA
KDL-24EX325	P18367100	0xdd95e44f	0x04150000	T240HW01 V02	I2	AEP-S	EUA
KDL-24EX325	P18367110	0xdd95e44f	0x04150000	T240HW01 V02	I2	AEP-S	EUA
KDL-24EX325	P18367105	0xdd95e44f	0x04150000	T240HW01 V02	I2	AEP-S	EUA
KDL-24EX325	P18367115	0xdd95e44f	0x04150000	T240HW01 V02	I2	AEP-S	EUA
KDL-26EX320	P18355700	0xdd95e32d	0x03150000	LC260EXN-SDA2	I2	AEP	EUA
KDL-26EX320	P18409303	0xdd95e32d	0x03150000	LC260EXN-SDA2	I2	AEP	EUA
KDL-26EX320	P18355701	0xdd95e32d	0x03150000	LC260EXN-SDA2	I2	AEP	EUA
KDL-26EX320	P18360000	0xdd95e32d	0x0d150000	LC260EXN-SDA2	I2	AEP-MHP	EIA
KDL-26EX321	P18395503	0xdd95e32d	0x03150000	LC260EXN-SDA2	I2	AEP	EUA
KDL-26EX325	P18366900	0xdd95e42d	0x04150000	LC260EXN-SDA2	I2	AEP-S	EUA
KDL-26EX325	P18366905	0xdd95e42d	0x04150000	LC260EXN-SDA2	I2	AEP-S	EUA
KDL-32CX520	P18356400	0x1d95e334	0x03090000	LTY320HN0201	I4_I6	AEP	EUA
KDL-32CX520	P18376100	0x1d95e334	0x03090000	LTY320HN0201	I4_I6	AEP	EUA
KDL-32CX520	P18356401	0x1d95e334	0x03090000	LTY320HN0201	I4_I6	AEP	EUA
KDL-32CX520	P18356420	0x1d95e334	0x03090000	LTY320HN0201	I4_I6	AEP	EUA
KDL-32CX520	P18356400	0x1d95e335	0x03090000	V315B6-L03	I4_I6	AEP	EUA

Model Name	ProductCode	Model-ID	Product-ID	Panel Name	000 SEG	001 DEST	PKG
KDL-32CX520	P18356400	0x1d95e335	0x03090000	V315H3-L01	I4_I6	AEP	EUA
KDL-32CX520	P18376100	0x1d95e335	0x03090000	V315B6-L03	I4_I6	AEP	EUA
KDL-32CX520	P18376100	0x1d95e335	0x03090000	V315H3-L01	I4_I6	AEP	EUA
KDL-32CX520	P18356401	0x1d95e335	0x03090000	V315B6-L03	I4_I6	AEP	EUA
KDL-32CX520	P18356401	0x1d95e335	0x03090000	V315H3-L01	I4_I6	AEP	EUA
KDL-32CX520	P18356420	0x1d95e335	0x03090000	V315B6-L03	I4_I6	AEP	EUA
KDL-32CX520	P18356420	0x1d95e335	0x03090000	V315H3-L01	I4_I6	AEP	EUA
KDL-32CX520	P18356400	0x1d95e357	0x03090000	LTY320HN0202	I4_I6	AEP	EUA
KDL-32CX520	P18376100	0x1d95e357	0x03090000	LTY320HN0202	I4_I6	AEP	EUA
KDL-32CX520	P18356401	0x1d95e357	0x03090000	LTY320HN0202	I4_I6	AEP	EUA
KDL-32CX520	P18356420	0x1d95e357	0x03090000	LTY320HN0202	I4_I6	AEP	EUA
KDL-32CX521	P18408400	0x1d95e334	0x03090000	LTY320HN0201	I4_I6	AEP	EUA
KDL-32CX521	P18408203	0x1d95e334	0x03090000	LTY320HN0201	I4_I6	AEP	EUA
KDL-32CX521	P18408400	0x1d95e335	0x03090000	V315B6-L03	I4_I6	AEP	EUA
KDL-32CX521	P18408400	0x1d95e335	0x03090000	V315H3-L01	I4_I6	AEP	EUA
KDL-32CX521	P18408203	0x1d95e335	0x03090000	V315B6-L03	I4_I6	AEP	EUA
KDL-32CX521	P18408203	0x1d95e335	0x03090000	V315H3-L01	I4_I6	AEP	EUA
KDL-32CX521	P18408400	0x1d95e357	0x03090000	LTY320HN0202	I4_I6	AEP	EUA
KDL-32CX521	P18408203	0x1d95e357	0x03090000	LTY320HN0202	I4_I6	AEP	EUA
KDL-32CX521	P18408203	0x1d95e357	0x03090000	LTY320HN0202	I4_I6	AEP	EUA
KDL-32CX523	P18371800	0x1d95e534	0x0c090000	LTY320HN0201	I4_I6	AEP-T2	EUA
KDL-32CX523	P18371801	0x1d95e534	0x0c090000	LTY320HN0201	I4_I6	AEP-T2	EUA
KDL-32CX523	P18371800	0x1d95e535	0x0c090000	V315B6-L03	I4_I6	AEP-T2	EUA
KDL-32CX523	P18371800	0x1d95e535	0x0c090000	V315H3-L01	I4_I6	AEP-T2	EUA
KDL-32CX523	P18371801	0x1d95e535	0x0c090000	V315B6-L03	I4_I6	AEP-T2	EUA
KDL-32CX523	P18371801	0x1d95e535	0x0c090000	V315H3-L01	I4_I6	AEP-T2	EUA
KDL-32CX523	P18371800	0x1d95e557	0x0c090000	LTY320HN0202	I4_I6	AEP-T2	EUA
KDL-32CX523	P18371801	0x1d95e557	0x0c090000	LTY320HN0202	I4_I6	AEP-T2	EUA
KDL-32CX525	P18367600	0x1d95e434	0x04090000	LTY320HN0201	I4_I6	AEP-S	EUA
KDL-32CX525	P18367600	0x1d95e435	0x04090000	V315B6-L03	I4_I6	AEP-S	EUA
KDL-32CX525	P18367600	0x1d95e435	0x04090000	V315H3-L01	I4_I6	AEP-S	EUA
KDL-32CX525	P18367600	0x1d95e457	0x04090000	LTY320HN0202	I4_I6	AEP-S	EUA
KDL-32EX421	P18355500	0x1d95e32b	0x03080000	LTY320AN0201	I1_I5	AEP	EUA
KDL-32EX421	P18375200	0x1d95e32b	0x03080000	LTY320AN0201	I1_I5	AEP	EUA
KDL-32EX421	P18416300	0x1d95e32b	0x03080000	LTY320AN0201	I1_I5	AEP	EUA
KDL-32EX421	P18359800	0x1d95e32b	0x0d080000	LTY320AN0201	I1_I5	AEP-MHP	EIA
KDL-32EX421	P18416000	0x1d95e32b	0x0d080000	LTY320AN0201	I1_I5	AEP-MHP	EIA
KDL-32EX421	P18355500	0x1d95e353	0x03080000	V315B5-LE2	I1_I5	AEP	EUA
KDL-32EX421	P18375200	0x1d95e353	0x03080000	V315B5-LE2	I1_I5	AEP	EUA
KDL-32EX421	P18416300	0x1d95e353	0x03080000	V315B5-LE2	I1_I5	AEP	EUA
KDL-32EX421	P18359800	0x1d95e353	0x0d080000	V315B5-LE2	I1_I5	AEP-MHP	EIA
KDL-32EX421	P18416000	0x1d95e353	0x0d080000	V315B5-LE2	I1_I5	AEP-MHP	EIA

**Note: PKG Information EUA=All Europe (Except Italy) / EIA= Italy Only**

## Appendix 1 - Model ID / Product ID and Panel Information

Model Name	ProductCode	Model-ID	Product-ID	Panel Name	000 SEG	001 DEST	PKG
KDL-32EX425	P18366700	0x1d95e42b	0x04080000	LTY320AN0201	I1_I5	AEP-S	EUA
KDL-32EX425	P18366700	0x1d95e453	0x04080000	V315B5-LE2	I1_I5	AEP-S	EUA
KDL-32EX520	P18402500	0x1d95e329	0x031f0000	LTY320HN0101	I1_DE	AEP	EUA
KDL-32EX520	P18402500	0x1d95e32a	0x031f0000	T315HW07 V6	I1_DE	AEP	EUA
KDL-32EX520	P18402500	0x1d95e355	0x031f0000	LTY320HN0102	I1_DE	AEP	EUA
KDL-32EX521	P18375100	0x1d95e329	0x03080000	LTY320HN0101	I1_I5	AEP	EUA
KDL-32EX521	P18402300	0x1d95e329	0x03080000	LTY320HN0101	I1_I5	AEP	EUA
KDL-32EX521	P18402320	0x1d95e329	0x03080000	LTY320HN0101	I1_I5	AEP	EUA
KDL-32EX521	P18414500	0x1d95e329	0x0d080000	LTY320HN0101	I1_I5	AEP-MHP	EIA
KDL-32EX521	P18375100	0x1d95e32a	0x03080000	T315HW07 V6	I1_I5	AEP	EUA
KDL-32EX521	P18402300	0x1d95e32a	0x03080000	T315HW07 V6	I1_I5	AEP	EUA
KDL-32EX521	P18402320	0x1d95e32a	0x03080000	T315HW07 V6	I1_I5	AEP	EUA
KDL-32EX521	P18414500	0x1d95e32a	0x0d080000	T315HW07 V6	I1_I5	AEP-MHP	EIA
KDL-32EX521	P18375100	0x1d95e355	0x03080000	LTY320HN0102	I1_I5	AEP	EUA
KDL-32EX521	P18402300	0x1d95e355	0x03080000	LTY320HN0102	I1_I5	AEP	EUA
KDL-32EX521	P18402320	0x1d95e355	0x03080000	LTY320HN0102	I1_I5	AEP	EUA
KDL-32EX521	P18414500	0x1d95e355	0x0d080000	LTY320HN0102	I1_I5	AEP-MHP	EIA
KDL-32EX523	P18391901	0x1d95e529	0x0c1f0000	LTY320HN0101	I1_DE	AEP-T2	EUA
KDL-32EX523	P18391901	0x1d95e52a	0x0c1f0000	T315HW07 V6	I1_DE	AEP-T2	EUA
KDL-32EX523	P18391901	0x1d95e555	0x0c1f0000	LTY320HN0102	I1_DE	AEP-T2	EUA
KDL-32EX524	P18370800	0x1d95e529	0x0c080000	LTY320HN0101	I1_I5	AEP-T2	EUA
KDL-32EX524	P18370801	0x1d95e529	0x0c080000	LTY320HN0101	I1_I5	AEP-T2	EUA
KDL-32EX524	P18370800	0x1d95e52a	0x0c080000	T315HW07 V6	I1_I5	AEP-T2	EUA
KDL-32EX524	P18370801	0x1d95e52a	0x0c080000	T315HW07 V6	I1_I5	AEP-T2	EUA
KDL-32EX524	P18370800	0x1d95e555	0x0c080000	LTY320HN0102	I1_I5	AEP-T2	EUA
KDL-32EX524	P18370801	0x1d95e555	0x0c080000	LTY320HN0102	I1_I5	AEP-T2	EUA
KDL-32EX525	P18366600	0x1d95e429	0x04080000	LTY320HN0101	I1_I5	AEP-S	EUA
KDL-32EX525	P18366605	0x1d95e429	0x04080000	LTY320HN0101	I1_I5	AEP-S	EUA
KDL-32EX525	P18366600	0x1d95e42a	0x04080000	T315HW07 V6	I1_I5	AEP-S	EUA
KDL-32EX525	P18366605	0x1d95e42a	0x04080000	T315HW07 V6	I1_I5	AEP-S	EUA
KDL-32EX525	P18366600	0x1d95e455	0x04080000	LTY320HN0102	I1_I5	AEP-S	EUA
KDL-32EX525	P18366605	0x1d95e455	0x04080000	LTY320HN0102	I1_I5	AEP-S	EUA
KDL-32EX720	P18354700	0x3d65e323	0x03050000	LTY320HJ0101	N4_N9	AEP	EUA
KDL-32EX720	P18374500	0x3d65e323	0x03050000	LTY320HJ0101	N4_N9	AEP	EUA
KDL-32EX720	P18359100	0x3d65e323	0x0d050000	LTY320HJ0101	N4_N9	AEP-MHP	EIA
KDL-32EX720	P18354700	0x3d65e324	0x03050000	T315HW07 V7	N4_N9	AEP	EUA
KDL-32EX720	P18374500	0x3d65e324	0x03050000	T315HW07 V7	N4_N9	AEP	EUA
KDL-32EX720	P18359100	0x3d65e324	0x0d050000	T315HW07 V7	N4_N9	AEP-MHP	EIA
KDL-32EX720	P18354700	0x3d65e354	0x03050000	V315H3-PE5A	N4_N9	AEP	EUA
KDL-32EX720	P18374500	0x3d65e354	0x03050000	V315H3-PE5A	N4_N9	AEP	EUA
KDL-32EX720	P18359100	0x3d65e354	0x0d050000	V315H3-PE5A	N4_N9	AEP-MHP	EIA

Model Name	ProductCode	Model-ID	Product-ID	Panel Name	000 SEG	001 DEST	PKG
KDL-32EX721	P18354800	0x3d65e323	0x03140000	LTY320HJ0101	N5	AEP	EUA
KDL-32EX721	P18354800	0x3d65e324	0x03140000	T315HW07 V7	N5	AEP	EUA
KDL-32EX721	P18354800	0x3d65e354	0x03140000	V315H3-PE5A	N5	AEP	EUA
KDL-32EX723	P18370200	0x3d65e523	0x0c050000	LTY320HJ0101	N4_N9	AEP-T2	EUA
KDL-32EX723	P18370201	0x3d65e523	0x0c050000	LTY320HJ0101	N4_N9	AEP-T2	EUA
KDL-32EX723	P18370200	0x3d65e524	0x0c050000	T315HW07 V7	N4_N9	AEP-T2	EUA
KDL-32EX723	P18370201	0x3d65e524	0x0c050000	T315HW07 V7	N4_N9	AEP-T2	EUA
KDL-32EX723	P18370200	0x3d65e554	0x0c050000	V315H3-PE5A	N4_N9	AEP-T2	EUA
KDL-32EX723	P18370201	0x3d65e554	0x0c050000	V315H3-PE5A	N4_N9	AEP-T2	EUA
KDL-32EX724	P18391400	0x3d65e523	0x0c140000	LTY320HJ0101	N5	AEP-T2	EUA
KDL-32EX724	P18391401	0x3d65e523	0x0c140000	LTY320HJ0101	N5	AEP-T2	EUA
KDL-32EX724	P18391400	0x3d65e524	0x0c140000	T315HW07 V7	N5	AEP-T2	EUA
KDL-32EX724	P18391401	0x3d65e524	0x0c140000	T315HW07 V7	N5	AEP-T2	EUA
KDL-32EX724	P18391400	0x3d65e554	0x0c140000	V315H3-PE5A	N5	AEP-T2	EUA
KDL-32EX724	P18391401	0x3d65e554	0x0c140000	V315H3-PE5A	N5	AEP-T2	EUA
KDL-32EX725	P18365700	0x3d65e423	0x04050000	LTY320HJ0101	N4_N9	AEP-S	EUA
KDL-32EX725	P18365705	0x3d65e423	0x04050000	LTY320HJ0101	N4_N9	AEP-S	EUA
KDL-32EX725	P18414200	0x3d65e423	0x13050000	LTY320HJ0101	N4_N9	AEP-S-MHP	EIA
KDL-32EX725	P18365700	0x3d65e424	0x04050000	T315HW07 V7	N4_N9	AEP-S	EUA
KDL-32EX725	P18365705	0x3d65e424	0x04050000	T315HW07 V7	N4_N9	AEP-S	EUA
KDL-32EX725	P18414200	0x3d65e424	0x13050000	T315HW07 V7	N4_N9	AEP-S-MHP	EIA
KDL-32EX725	P18365700	0x3d65e454	0x04050000	V315H3-PE5A	N4_N9	AEP-S	EUA
KDL-32EX725	P18365705	0x3d65e454	0x04050000	V315H3-PE5A	N4_N9	AEP-S	EUA
KDL-32EX725	P18414200	0x3d65e454	0x13050000	V315H3-PE5A	N4_N9	AEP-S-MHP	EIA
KDL-32EX726	P18365800	0x3d65e423	0x04140000	LTY320HJ0101	N5	AEP-S	EUA
KDL-32EX726	P18365800	0x3d65e424	0x04140000	T315HW07 V7	N5	AEP-S	EUA
KDL-32EX726	P18365800	0x3d65e454	0x04140000	V315H3-PE5A	N5	AEP-S	EUA
KDL-32EX727	P18411000	0x3d65e423	0x04140000	LTY320HJ0101	N5	AEP-S	EUA
KDL-32EX727	P18411000	0x3d65e424	0x04140000	T315HW07 V7	N5	AEP-S	EUA
KDL-32EX727	P18411000	0x3d65e454	0x04140000	V315H3-PE5A	N5	AEP-S	EUA
KDL-32EX728	P18411100	0x3d65e423	0x04140000	LTY320HJ0101	N5	AEP-S	EUA
KDL-32EX728	P18411100	0x3d65e424	0x04140000	T315HW07 V7	N5	AEP-S	EUA
KDL-32EX728	P18411100	0x3d65e454	0x04140000	V315H3-PE5A	N5	AEP-S	EUA
KDL-32EX729	P18411200	0x3d65e423	0x04140000	LTY320HJ0101	N5	AEP-S	EUA
KDL-32EX729	P18411200	0x3d65e424	0x04140000	T315HW07 V7	N5	AEP-S	EUA
KDL-32EX729	P18411200	0x3d65e454	0x04140000	V315H3-PE5A	N5	AEP-S	EUA
KDL-37EX521	P18355300	0x1d95e328	0x03080000	T370HW05 V0	I1_I5	AEP	EUA
KDL-37EX521	P18416200	0x1d95e328	0x03080000	T370HW05 V0	I1_I5	AEP	EUA
KDL-37EX521	P18359600	0x1d95e328	0x0d080000	T370HW05 V0	I1_I5	AEP-MHP	EIA
KDL-37EX521	P18415900	0x1d95e328	0x0d080000	T370HW05 V0	I1_I5	AEP-MHP	EIA
KDL-37EX524	P18370700	0x1d95e528	0x0c080000	T370HW05 V0	I1_I5	AEP-T2	EUA

**Note: PKG Information EUA=All Europe (Except Italy) / EIA= Italy Only**

## Appendix 1 - Model ID / Product ID and Panel Information

Model Name	ProductCode	Model-ID	Product-ID	Panel Name	000 SEG	001 DEST	PKG
KDL-37EX524	P18370701	0x1d95e528	0x0c080000	T370HW05 V0	I1_15	AEP-T2	EUA
KDL-37EX525	P18366500	0x1d95e428	0x04080000	T370HW05 V0	I1_15	AEP-S	EUA
KDL-37EX525	P18366505	0x1d95e428	0x04080000	T370HW05 V0	I1_15	AEP-S	EUA
KDL-37EX720	P18354500	0x3d65e322	0x03050000	V370H4-PE1	N4_N9	AEP	EUA
KDL-37EX720	P18354500	0x3d65e322	0x03050000	FDMR370NN0101	N4_N9	AEP	EUA
KDL-37EX720	P18354500	0x3d65e322	0x03050000	V370H4-LE1	N4_N9	AEP	EUA
KDL-37EX720	P18359000	0x3d65e322	0x0d050000	V370H4-PE1	N4_N9	AEP-MHP	EIA
KDL-37EX720	P18359000	0x3d65e322	0x0d050000	FDMR370NN0101	N4_N9	AEP-MHP	EIA
KDL-37EX720	P18359000	0x3d65e322	0x0d050000	V370H4-LE1	N4_N9	AEP-MHP	EIA
KDL-37EX723	P18426001	0x3d65e522	0x0c050000	V370H4-PE1	N4_N9	AEP-T2	EUA
KDL-37EX723	P18426001	0x3d65e522	0x0c050000	FDMR370NN0101	N4_N9	AEP-T2	EUA
KDL-37EX723	P18426001	0x3d65e522	0x0c050000	V370H4-LE1	N4_N9	AEP-T2	EUA
KDL-37EX725	P18365300	0x3d65e422	0x04050000	V370H4-PE1	N4_N9	AEP-S	EUA
KDL-37EX725	P18365300	0x3d65e422	0x04050000	FDMR370NN0101	N4_N9	AEP-S	EUA
KDL-37EX725	P18365300	0x3d65e422	0x04050000	V370H4-LE1	N4_N9	AEP-S	EUA
KDL-37EX725	P18365305	0x3d65e422	0x04050000	V370H4-PE1	N4_N9	AEP-S	EUA
KDL-37EX725	P18365305	0x3d65e422	0x04050000	FDMR370NN0101	N4_N9	AEP-S	EUA
KDL-37EX725	P18365305	0x3d65e422	0x04050000	V370H4-LE1	N4_N9	AEP-S	EUA
KDL-40CX520	P18356300	0x1d95e332	0x03090000	LTU400HM0201	I4_16	AEP	EUA
KDL-40CX520	P18376000	0x1d95e332	0x03090000	LTU400HM0201	I4_16	AEP	EUA
KDL-40CX520	P18356301	0x1d95e332	0x03090000	LTU400HM0201	I4_16	AEP	EUA
KDL-40CX520	P18356320	0x1d95e332	0x03090000	LTU400HM0201	I4_16	AEP	EUA
KDL-40CX520	P18356300	0x1d95e333	0x03090000	V400H1-L11	I4_16	AEP	EUA
KDL-40CX520	P18376000	0x1d95e333	0x03090000	V400H1-L11	I4_16	AEP	EUA
KDL-40CX520	P18356301	0x1d95e333	0x03090000	V400H1-L11	I4_16	AEP	EUA
KDL-40CX520	P18356320	0x1d95e333	0x03090000	V400H1-L11	I4_16	AEP	EUA
KDL-40CX521	P18408300	0x1d95e332	0x03090000	LTU400HM0201	I4_16	AEP	EUA
KDL-40CX521	P18408103	0x1d95e332	0x03090000	LTU400HM0201	I4_16	AEP	EUA
KDL-40CX521	P18408300	0x1d95e333	0x03090000	V400H1-L11	I4_16	AEP	EUA
KDL-40CX521	P18408103	0x1d95e333	0x03090000	V400H1-L11	I4_16	AEP	EUA
KDL-40CX523	P18371700	0x1d95e532	0x0c090000	LTU400HM0201	I4_16	AEP-T2	EUA
KDL-40CX523	P18371701	0x1d95e532	0x0c090000	LTU400HM0201	I4_16	AEP-T2	EUA
KDL-40CX523	P18371700	0x1d95e533	0x0c090000	V400H1-L11	I4_16	AEP-T2	EUA
KDL-40CX523	P18371701	0x1d95e533	0x0c090000	V400H1-L11	I4_16	AEP-T2	EUA
KDL-40CX525	P18367500	0x1d95e432	0x04090000	LTU400HM0201	I4_16	AEP-S	EUA
KDL-40CX525	P18367500	0x1d95e433	0x04090000	V400H1-L11	I4_16	AEP-S	EUA
KDL-40EX520	P18402400	0x1d95e326	0x031f0000	LTU400HM0101	I1_DE	AEP	EUA
KDL-40EX520	P18402400	0x1d95e327	0x031f0000	T400HW04 V0	I1_DE	AEP	EUA
KDL-40EX520	P18402400	0x1d95e351	0x031f0000	V400HJ2-LE1	I1_DE	AEP	EUA
KDL-40EX520	P18402400	0x1d95e359	0x031f0000	LTY400HM0801	I1_DE	AEP	EUA
KDL-40EX521	P18374900	0x1d95e326	0x03080000	LTU400HM0101	I1_15	AEP	EUA

Model Name	ProductCode	Model-ID	Product-ID	Panel Name	000 SEG	001 DEST	PKG
KDL-40EX521	P18402100	0x1d95e326	0x03080000	LTU400HM0101	I1_15	AEP	EUA
KDL-40EX521	P18402120	0x1d95e326	0x03080000	LTU400HM0101	I1_15	AEP	EUA
KDL-40EX521	P18414600	0x1d95e326	0x0d080000	LTU400HM0101	I1_15	AEP-MHP	EIA
KDL-40EX521	P18374900	0x1d95e327	0x03080000	T400HW04 V0	I1_15	AEP	EUA
KDL-40EX521	P18402100	0x1d95e327	0x03080000	T400HW04 V0	I1_15	AEP	EUA
KDL-40EX521	P18402120	0x1d95e327	0x03080000	T400HW04 V0	I1_15	AEP	EUA
KDL-40EX521	P18414600	0x1d95e327	0x0d080000	T400HW04 V0	I1_15	AEP-MHP	EIA
KDL-40EX521	P18374900	0x1d95e351	0x03080000	V400HJ2-LE1	I1_15	AEP	EUA
KDL-40EX521	P18402100	0x1d95e351	0x03080000	V400HJ2-LE1	I1_15	AEP	EUA
KDL-40EX521	P18402120	0x1d95e351	0x03080000	V400HJ2-LE1	I1_15	AEP	EUA
KDL-40EX521	P18414600	0x1d95e351	0x0d080000	V400HJ2-LE1	I1_15	AEP-MHP	EIA
KDL-40EX521	P18374900	0x1d95e359	0x03080000	LTY400HM0801	I1_15	AEP	EUA
KDL-40EX521	P18402100	0x1d95e359	0x03080000	LTY400HM0801	I1_15	AEP	EUA
KDL-40EX521	P18402120	0x1d95e359	0x03080000	LTY400HM0801	I1_15	AEP	EUA
KDL-40EX521	P18414600	0x1d95e359	0x0d080000	LTY400HM0801	I1_15	AEP-MHP	EIA
KDL-40EX523	P18392001	0x1d95e526	0x0c1f0000	LTU400HM0101	I1_DE	AEP-T2	EUA
KDL-40EX523	P18392001	0x1d95e527	0x0c1f0000	T400HW04 V0	I1_DE	AEP-T2	EUA
KDL-40EX523	P18392001	0x1d95e551	0x0c1f0000	V400HJ2-LE1	I1_DE	AEP-T2	EUA
KDL-40EX523	P18392001	0x1d95e559	0x0c1f0000	LTY400HM0801	I1_DE	AEP-T2	EUA
KDL-40EX524	P18370600	0x1d95e526	0x0c080000	LTU400HM0101	I1_15	AEP-T2	EUA
KDL-40EX524	P18370601	0x1d95e526	0x0c080000	LTU400HM0101	I1_15	AEP-T2	EUA
KDL-40EX524	P18370600	0x1d95e527	0x0c080000	T400HW04 V0	I1_15	AEP-T2	EUA
KDL-40EX524	P18370601	0x1d95e527	0x0c080000	T400HW04 V0	I1_15	AEP-T2	EUA
KDL-40EX524	P18370600	0x1d95e551	0x0c080000	V400HJ2-LE1	I1_15	AEP-T2	EUA
KDL-40EX524	P18370601	0x1d95e551	0x0c080000	V400HJ2-LE1	I1_15	AEP-T2	EUA
KDL-40EX524	P18370600	0x1d95e559	0x0c080000	LTY400HM0801	I1_15	AEP-T2	EUA
KDL-40EX524	P18370601	0x1d95e559	0x0c080000	LTY400HM0801	I1_15	AEP-T2	EUA
KDL-40EX525	P18366400	0x1d95e426	0x04080000	LTU400HM0101	I1_15	AEP-S	EUA
KDL-40EX525	P18366405	0x1d95e426	0x04080000	LTU400HM0101	I1_15	AEP-S	EUA
KDL-40EX525	P18366400	0x1d95e427	0x04080000	T400HW04 V0	I1_15	AEP-S	EUA
KDL-40EX525	P18366405	0x1d95e427	0x04080000	T400HW04 V0	I1_15	AEP-S	EUA
KDL-40EX525	P18366400	0x1d95e451	0x04080000	V400HJ2-LE1	I1_15	AEP-S	EUA
KDL-40EX525	P18366405	0x1d95e451	0x04080000	V400HJ2-LE1	I1_15	AEP-S	EUA
KDL-40EX525	P18366400	0x1d95e459	0x04080000	LTY400HM0801	I1_15	AEP-S	EUA
KDL-40EX525	P18366405	0x1d95e459	0x04080000	LTY400HM0801	I1_15	AEP-S	EUA
KDL-40EX720	P18374300	0x3d65e31f	0x03050000	LTU400HF0301	N4_N9	AEP	EUA
KDL-40EX720	P18374300	0x3d65e31f	0x03050000	LTY400HF0901	N4_N9	AEP	EUA
KDL-40EX720	P18354302	0x3d65e31f	0x03050000	LTU400HF0301	N4_N9	AEP	EUA
KDL-40EX720	P18354302	0x3d65e31f	0x03050000	LTY400HF0901	N4_N9	AEP	EUA
KDL-40EX720	P18358900	0x3d65e31f	0x0d050000	LTU400HF0301	N4_N9	AEP-MHP	EIA
KDL-40EX720	P18358900	0x3d65e31f	0x0d050000	LTY400HF0901	N4_N9	AEP-MHP	EIA

**Note: PKG Information EUA=All Europe (Except Italy) / EIA= Italy Only**

## Appendix 1 - Model ID / Product ID and Panel Information

Model Name	ProductCode	Model-ID	Product-ID	Panel Name	000 SEG	001 DEST	PKG
KDL-40EX720	P18354300	0x3d65e31f	0x16050000	LTU400HF0301	N4_N9	AEP	EUA
KDL-40EX720	P18354300	0x3d65e31f	0x16050000	LTY400HF0901	N4_N9	AEP	EUA
KDL-40EX720	P18354304	0x3d65e31f	0x16050000	LTU400HF0301	N4_N9	AEP	EUA
KDL-40EX720	P18354304	0x3d65e31f	0x16050000	LTY400HF0901	N4_N9	AEP	EUA
KDL-40EX720	P18374300	0x3d65e320	0x03050000	T400HW04 V1	N4_N9	AEP	EUA
KDL-40EX720	P18354302	0x3d65e320	0x03050000	T400HW04 V1	N4_N9	AEP	EUA
KDL-40EX720	P18358900	0x3d65e320	0x0d050000	T400HW04 V1	N4_N9	AEP-MHP	EIA
KDL-40EX720	P18354300	0x3d65e320	0x16050000	T400HW04 V1	N4_N9	AEP	EUA
KDL-40EX720	P18354304	0x3d65e320	0x16050000	T400HW04 V1	N4_N9	AEP	EUA
KDL-40EX721	P18354402	0x3d65e31f	0x03140000	LTU400HF0301	N5	AEP	EUA
KDL-40EX721	P18354402	0x3d65e31f	0x03140000	LTY400HF0901	N5	AEP	EUA
KDL-40EX721	P18354400	0x3d65e31f	0x16140000	LTU400HF0301	N5	AEP	EUA
KDL-40EX721	P18354400	0x3d65e31f	0x16140000	LTY400HF0901	N5	AEP	EUA
KDL-40EX721	P18354404	0x3d65e31f	0x16140000	LTU400HF0301	N5	AEP	EUA
KDL-40EX721	P18354404	0x3d65e31f	0x16140000	LTY400HF0901	N5	AEP	EUA
KDL-40EX721	P18354402	0x3d65e320	0x03140000	T400HW04 V1	N5	AEP	EUA
KDL-40EX721	P18354400	0x3d65e320	0x16140000	T400HW04 V1	N5	AEP	EUA
KDL-40EX721	P18354404	0x3d65e320	0x16140000	T400HW04 V1	N5	AEP	EUA
KDL-40EX723	P18370000	0x3d65e51f	0x0c050000	LTU400HF0301	N4_N9	AEP-T2	EUA
KDL-40EX723	P18370000	0x3d65e51f	0x0c050000	LTY400HF0901	N4_N9	AEP-T2	EUA
KDL-40EX723	P18370001	0x3d65e51f	0x0c050000	LTU400HF0301	N4_N9	AEP-T2	EUA
KDL-40EX723	P18370001	0x3d65e51f	0x0c050000	LTY400HF0901	N4_N9	AEP-T2	EUA
KDL-40EX723	P18370000	0x3d65e520	0x0c050000	T400HW04 V1	N4_N9	AEP-T2	EUA
KDL-40EX723	P18370001	0x3d65e520	0x0c050000	T400HW04 V1	N4_N9	AEP-T2	EUA
KDL-40EX724	P18391300	0x3d65e51f	0x0c140000	LTU400HF0301	N5	AEP-T2	EUA
KDL-40EX724	P18391300	0x3d65e51f	0x0c140000	LTY400HF0901	N5	AEP-T2	EUA
KDL-40EX724	P18391301	0x3d65e51f	0x0c140000	LTU400HF0301	N5	AEP-T2	EUA
KDL-40EX724	P18391301	0x3d65e51f	0x0c140000	LTY400HF0901	N5	AEP-T2	EUA
KDL-40EX724	P18391300	0x3d65e520	0x0c140000	T400HW04 V1	N5	AEP-T2	EUA
KDL-40EX724	P18391301	0x3d65e520	0x0c140000	T400HW04 V1	N5	AEP-T2	EUA
KDL-40EX725	P18364902	0x3d65e41f	0x04050000	LTU400HF0301	N4_N9	AEP-S	EUA
KDL-40EX725	P18364902	0x3d65e41f	0x04050000	LTY400HF0901	N4_N9	AEP-S	EUA
KDL-40EX725	P18414300	0x3d65e41f	0x13050000	LTU400HF0301	N4_N9	AEP-S-MH	EIA
KDL-40EX725	P18414300	0x3d65e41f	0x13050000	LTY400HF0901	N4_N9	AEP-S-MH	EIA
KDL-40EX725	P18364900	0x3d65e41f	0x17050000	LTU400HF0301	N4_N9	AEP-S	EUA
KDL-40EX725	P18364900	0x3d65e41f	0x17050000	LTY400HF0901	N4_N9	AEP-S	EUA
KDL-40EX725	P18364904	0x3d65e41f	0x17050000	LTU400HF0301	N4_N9	AEP-S	EUA
KDL-40EX725	P18364904	0x3d65e41f	0x17050000	LTY400HF0901	N4_N9	AEP-S	EUA
KDL-40EX725	P18364905	0x3d65e41f	0x17050000	LTU400HF0301	N4_N9	AEP-S	EUA
KDL-40EX725	P18364905	0x3d65e41f	0x17050000	LTY400HF0901	N4_N9	AEP-S	EUA
KDL-40EX725	P18364902	0x3d65e420	0x04050000	T400HW04 V1	N4_N9	AEP-S	EUA

Model Name	ProductCode	Model-ID	Product-ID	Panel Name	000 SEG	001 DEST	PKG
KDL-40EX725	P18414300	0x3d65e420	0x13050000	T400HW04 V1	N4_N9	AEP-S-MHP	EIA
KDL-40EX725	P18364900	0x3d65e420	0x17050000	T400HW04 V1	N4_N9	AEP-S	EUA
KDL-40EX725	P18364904	0x3d65e420	0x17050000	T400HW04 V1	N4_N9	AEP-S	EUA
KDL-40EX725	P18364905	0x3d65e420	0x17050000	T400HW04 V1	N4_N9	AEP-S	EUA
KDL-40EX726	P18411302	0x3d65e41f	0x04140000	LTU400HF0301	N5	AEP-S	EUA
KDL-40EX726	P18411302	0x3d65e41f	0x04140000	LTY400HF0901	N5	AEP-S	EUA
KDL-40EX726	P18411300	0x3d65e41f	0x17140000	LTU400HF0301	N5	AEP-S	EUA
KDL-40EX726	P18411300	0x3d65e41f	0x17140000	LTY400HF0901	N5	AEP-S	EUA
KDL-40EX726	P18411304	0x3d65e41f	0x17140000	LTU400HF0301	N5	AEP-S	EUA
KDL-40EX726	P18411304	0x3d65e41f	0x17140000	LTY400HF0901	N5	AEP-S	EUA
KDL-40EX726	P18411302	0x3d65e420	0x04140000	T400HW04 V1	N5	AEP-S	EUA
KDL-40EX726	P18411300	0x3d65e420	0x17140000	T400HW04 V1	N5	AEP-S	EUA
KDL-40EX726	P18411304	0x3d65e420	0x17140000	T400HW04 V1	N5	AEP-S	EUA
KDL-40EX727	P18410900	0x3d65e41f	0x04140000	LTU400HF0301	N5	AEP-S	EUA
KDL-40EX727	P18410900	0x3d65e41f	0x04140000	LTY400HF0901	N5	AEP-S	EUA
KDL-40EX727	P18410900	0x3d65e420	0x04140000	T400HW04 V1	N5	AEP-S	EUA
KDL-40EX728	P18410700	0x3d65e41f	0x04140000	LTU400HF0301	N5	AEP-S	EUA
KDL-40EX728	P18410700	0x3d65e41f	0x04140000	LTY400HF0901	N5	AEP-S	EUA
KDL-40EX728	P18410700	0x3d65e420	0x04140000	T400HW04 V1	N5	AEP-S	EUA
KDL-40EX729	P18410800	0x3d65e41f	0x04140000	LTU400HF0301	N5	AEP-S	EUA
KDL-40EX729	P18410800	0x3d65e41f	0x04140000	LTY400HF0901	N5	AEP-S	EUA
KDL-40EX729	P18410800	0x3d65e420	0x04140000	T400HW04 V1	N5	AEP-S	EUA
KDL-40HX720	P18352800	0x5d45e312	0x03160000	LTU400HL0101	Y3	AEP	EUA
KDL-40HX720	P18352800	0x5d45e312	0x03160000	LTY400HL0301	Y3	AEP	EUA
KDL-40HX723	P18369200	0x5d45e512	0x0c160000	LTU400HL0101	Y3	AEP-T2	EUA
KDL-40HX723	P18369200	0x5d45e512	0x0c160000	LTY400HL0301	Y3	AEP-T2	EUA
KDL-40HX723	P18369201	0x5d45e512	0x0c160000	LTU400HL0101	Y3	AEP-T2	EUA
KDL-40HX723	P18369201	0x5d45e512	0x0c160000	LTY400HL0301	Y3	AEP-T2	EUA
KDL-40HX725	P18362300	0x5d45e412	0x04160000	LTU400HL0101	Y3	AEP-S	EUA
KDL-40HX725	P18362300	0x5d45e412	0x04160000	LTY400HL0301	Y3	AEP-S	EUA
KDL-40HX725	P18362305	0x5d45e412	0x04160000	LTU400HL0101	Y3	AEP-S	EUA
KDL-40HX725	P18362305	0x5d45e412	0x04160000	LTY400HL0301	Y3	AEP-S	EUA
KDL-40NX720	P18353400	0x4d55e316	0x03040000	LTK400HF0201	N1	AEP	EUA
KDL-40NX720	P18353400	0x4d55e316	0x03040000	FDLL400NT0101	N1	AEP	EUA
KDL-40NX720	P18353400	0x4d55e316	0x03040000	LSY400HF0101	N1	AEP	EUA
KDL-40NX720	P18408003	0x4d55e316	0x03040000	LTK400HF0201	N1	AEP	EUA
KDL-40NX720	P18408003	0x4d55e316	0x03040000	FDLL400NT0101	N1	AEP	EUA
KDL-40NX720	P18408003	0x4d55e316	0x03040000	LSY400HF0101	N1	AEP	EUA
KDL-40NX720	P18358400	0x4d55e316	0x0d040000	LTK400HF0201	N1	AEP-MHP	EIA
KDL-40NX720	P18358400	0x4d55e316	0x0d040000	FDLL400NT0101	N1	AEP-MHP	EIA
KDL-40NX720	P18358400	0x4d55e316	0x0d040000	LSY400HF0101	N1	AEP-MHP	EIA

**Note: PKG Information EUA=All Europe (Except Italy) / EIA= Italy Only**

## Appendix 1 - Model ID / Product ID and Panel Information

Model Name	ProductCode	Model-ID	Product-ID	Panel Name	000 SEG	001 DEST	PKG
KDL-40NX720	P18353400	0x4d55e318	0x03040000	V400HK2-PE1	N1	AEP	EUA
KDL-40NX720	P18408003	0x4d55e318	0x03040000	V400HK2-PE1	N1	AEP	EUA
KDL-40NX720	P18358400	0x4d55e318	0x0d040000	V400HK2-PE1	N1	AEP-MHP	EIA
KDL-40NX721	P18427500	0x4d55e316	0x03040000	LTK400HF0201	N1	AEP	EUA
KDL-40NX721	P18427500	0x4d55e316	0x03040000	FDLL400NT0101	N1	AEP	EUA
KDL-40NX721	P18427500	0x4d55e316	0x03040000	LSY400HF0101	N1	AEP	EUA
KDL-40NX721	P18427900	0x4d55e316	0x0d040000	LTK400HF0201	N1	AEP-MHP	EIA
KDL-40NX721	P18427900	0x4d55e316	0x0d040000	FDLL400NT0101	N1	AEP-MHP	EIA
KDL-40NX721	P18427900	0x4d55e316	0x0d040000	LSY400HF0101	N1	AEP-MHP	EIA
KDL-40NX721	P18427500	0x4d55e318	0x03040000	V400HK2-PE1	N1	AEP	EUA
KDL-40NX721	P18427900	0x4d55e318	0x0d040000	V400HK2-PE1	N1	AEP-MHP	EIA
KDL-40NX722	P18428100	0x4d55e316	0x03040000	LTK400HF0201	N1	AEP	EUA
KDL-40NX722	P18428100	0x4d55e316	0x03040000	FDLL400NT0101	N1	AEP	EUA
KDL-40NX722	P18428100	0x4d55e316	0x03040000	LSY400HF0101	N1	AEP	EUA
KDL-40NX722	P18428200	0x4d55e316	0x0d040000	LTK400HF0201	N1	AEP-MHP	EIA
KDL-40NX722	P18428200	0x4d55e316	0x0d040000	FDLL400NT0101	N1	AEP-MHP	EIA
KDL-40NX722	P18428200	0x4d55e316	0x0d040000	LSY400HF0101	N1	AEP-MHP	EIA
KDL-40NX722	P18428100	0x4d55e318	0x03040000	V400HK2-PE1	N1	AEP	EUA
KDL-40NX722	P18428200	0x4d55e318	0x0d040000	V400HK2-PE1	N1	AEP-MHP	EIA
KDL-40NX723	P18369600	0x4d55e516	0x0c040000	LTK400HF0201	N1	AEP-T2	EUA
KDL-40NX723	P18369600	0x4d55e516	0x0c040000	FDLL400NT0101	N1	AEP-T2	EUA
KDL-40NX723	P18369600	0x4d55e516	0x0c040000	LSY400HF0101	N1	AEP-T2	EUA
KDL-40NX723	P18369601	0x4d55e516	0x0c040000	FDLL400NT0101	N1	AEP-T2	EUA
KDL-40NX723	P18369601	0x4d55e516	0x0c040000	LSY400HF0101	N1	AEP-T2	EUA
KDL-40NX723	P18369600	0x4d55e518	0x0c040000	V400HK2-PE1	N1	AEP-T2	EUA
KDL-40NX723	P18369601	0x4d55e518	0x0c040000	V400HK2-PE1	N1	AEP-T2	EUA
KDL-40NX725	P18363300	0x4d55e416	0x04040000	LTK400HF0201	N1	AEP-S	EUA
KDL-40NX725	P18363300	0x4d55e416	0x04040000	FDLL400NT0101	N1	AEP-S	EUA
KDL-40NX725	P18363300	0x4d55e416	0x04040000	LSY400HF0101	N1	AEP-S	EUA
KDL-40NX725	P18363300	0x4d55e418	0x04040000	V400HK2-PE1	N1	AEP-S	EUA
KDL-40NX725	P18363305	0x4d55e416	0x04040000	V400HK2-PE1	N1	AEP-S	EUA
KDL-40NX726	P18427800	0x4d55e416	0x04040000	LTK400HF0201	N1	AEP-S	EUA
KDL-40NX726	P18427800	0x4d55e416	0x04040000	FDLL400NT0101	N1	AEP-S	EUA
KDL-40NX726	P18427800	0x4d55e416	0x04040000	LSY400HF0101	N1	AEP-S	EUA
KDL-40NX726	P18427800	0x4d55e418	0x04040000	V400HK2-PE1	N1	AEP-S	EUA
KDL-40NX727	P18428300	0x4d55e416	0x04040000	LTK400HF0201	N1	AEP-S	EUA
KDL-40NX727	P18428300	0x4d55e416	0x04040000	FDLL400NT0101	N1	AEP-S	EUA

Model Name	ProductCode	Model-ID	Product-ID	Panel Name	000 SEG	001 DEST	PKG
KDL-40NX727	P18428300	0x4d55e416	0x04040000	LSY400HF0101	N1	AEP-S	EUA
KDL-40NX727	P18428300	0x4d55e418	0x04040000	V400HK2-PE1	N1	AEP-S	EUA
KDL-46CX520	P18356200	0x1d95e330	0x03090000	LTY460HN0101	I4_I6	AEP	EUA
KDL-46CX520	P18375900	0x1d95e330	0x03090000	LTY460HN0101	I4_I6	AEP	EUA
KDL-46CX520	P18356201	0x1d95e330	0x03090000	LTY460HN0101	I4_I6	AEP	EUA
KDL-46CX520	P18356220	0x1d95e330	0x03090000	LTY460HN0101	I4_I6	AEP	EUA
KDL-46CX520	P18356200	0x1d95e358	0x03090000	LTY460HN0102	I4_I6	AEP	EUA
KDL-46CX520	P18375900	0x1d95e358	0x03090000	LTY460HN0102	I4_I6	AEP	EUA
KDL-46CX520	P18356201	0x1d95e358	0x03090000	LTY460HN0102	I4_I6	AEP	EUA
KDL-46CX520	P18356220	0x1d95e358	0x03090000	LTY460HN0102	I4_I6	AEP	EUA
KDL-46CX525	P18367400	0x1d95e430	0x04090000	LTY460HN0101	I4_I6	AEP-S	EUA
KDL-46CX525	P18367400	0x1d95e458	0x04090000	LTY460HN0102	I4_I6	AEP-S	EUA
KDL-46EX520	P18392300	0x1d95e325	0x031f0000	LTY460HN0201	I1_DE	AEP	EUA
KDL-46EX520	P18416400	0x1d95e325	0x031f0000	LTY460HN0201	I1_DE	AEP	EUA
KDL-46EX520	P18392300	0x1d95e350	0x031f0000	V460H3-LE2	I1_DE	AEP	EUA
KDL-46EX520	P18416400	0x1d95e350	0x031f0000	V460H3-LE2	I1_DE	AEP	EUA
KDL-46EX520	P18392300	0x1d95e356	0x031f0000	LTY460HN0202	I1_DE	AEP	EUA
KDL-46EX520	P18416400	0x1d95e356	0x031f0000	LTY460HN0202	I1_DE	AEP	EUA
KDL-46EX521	P18355100	0x1d95e325	0x03080000	LTY460HN0201	I1_I5	AEP	EUA
KDL-46EX521	P18374800	0x1d95e325	0x03080000	LTY460HN0201	I1_I5	AEP	EUA
KDL-46EX521	P18416500	0x1d95e325	0x03080000	LTY460HN0201	I1_I5	AEP	EUA
KDL-46EX521	P18416520	0x1d95e325	0x03080000	LTY460HN0201	I1_I5	AEP	EUA
KDL-46EX521	P18359400	0x1d95e325	0x0d080000	LTY460HN0201	I1_I5	AEP-MHP	EIA
KDL-46EX521	P18416100	0x1d95e325	0x0d080000	LTY460HN0201	I1_I5	AEP-MHP	EIA
KDL-46EX521	P18355100	0x1d95e350	0x03080000	V460H3-LE2	I1_I5	AEP	EUA
KDL-46EX521	P18374800	0x1d95e350	0x03080000	V460H3-LE2	I1_I5	AEP	EUA
KDL-46EX521	P18416500	0x1d95e350	0x03080000	V460H3-LE2	I1_I5	AEP	EUA
KDL-46EX521	P18416520	0x1d95e350	0x03080000	V460H3-LE2	I1_I5	AEP	EUA
KDL-46EX521	P18359400	0x1d95e350	0x0d080000	V460H3-LE2	I1_I5	AEP-MHP	EIA
KDL-46EX521	P18416100	0x1d95e350	0x0d080000	V460H3-LE2	I1_I5	AEP-MHP	EIA
KDL-46EX521	P18355100	0x1d95e356	0x03080000	LTY460HN0202	I1_I5	AEP	EUA
KDL-46EX521	P18374800	0x1d95e356	0x03080000	LTY460HN0202	I1_I5	AEP	EUA
KDL-46EX521	P18416500	0x1d95e356	0x03080000	LTY460HN0202	I1_I5	AEP	EUA
KDL-46EX521	P18416520	0x1d95e356	0x03080000	LTY460HN0202	I1_I5	AEP	EUA
KDL-46EX521	P18359400	0x1d95e356	0x0d080000	LTY460HN0202	I1_I5	AEP-MHP	EIA
KDL-46EX521	P18416100	0x1d95e356	0x0d080000	LTY460HN0202	I1_I5	AEP-MHP	EIA
KDL-46EX524	P18370500	0x1d95e525	0x0c080000	LTY460HN0201	I1_I5	AEP-T2	EUA
KDL-46EX524	P18370501	0x1d95e525	0x0c080000	LTY460HN0201	I1_I5	AEP-T2	EUA
KDL-46EX524	P18370500	0x1d95e550	0x0c080000	V460H3-LE2	I1_I5	AEP-T2	EUA
KDL-46EX524	P18370501	0x1d95e550	0x0c080000	V460H3-LE2	I1_I5	AEP-T2	EUA
KDL-46EX524	P18370500	0x1d95e556	0x0c080000	LTY460HN0202	I1_I5	AEP-T2	EUA

**Note: PKG Information EUA=All Europe (Except Italy) / EIA= Italy Only**

## Appendix 1 - Model ID / Product ID and Panel Information

Model Name	ProductCode	Model-ID	Product-ID	Panel Name	000 SEG	001 DEST	PKG
KDL-46EX524	P18370501	0x1d95e556	0x0c080000	LTY460HN0202	I1_I5	AEP-T2	EUA
KDL-46EX525	P18366300	0x1d95e425	0x04080000	LTY460HN0201	I1_I5	AEP-S	EUA
KDL-46EX525	P18366300	0x1d95e450	0x04080000	V460H3-LE2	I1_I5	AEP-S	EUA
KDL-46EX525	P18366300	0x1d95e456	0x04080000	LTY460HN0202	I1_I5	AEP-S	EUA
KDL-46EX720	P18354102	0x3d65e306	0x03050000	11SCT2L460	N4_N9	AEP	EUA
KDL-46EX720	P18354102	0x3d65e306	0x03050000	LTY460HJ0501	N4_N9	AEP	EUA
KDL-46EX720	P18358800	0x3d65e306	0x0d050000	11SCT2L460	N4_N9	AEP-MHP	EIA
KDL-46EX720	P18358800	0x3d65e306	0x0d050000	LTY460HJ0501	N4_N9	AEP-MHP	EIA
KDL-46EX720	P18354100	0x3d65e306	0x16050000	11SCT2L460	N4_N9	AEP	EUA
KDL-46EX720	P18354100	0x3d65e306	0x16050000	LTY460HJ0501	N4_N9	AEP	EUA
KDL-46EX720	P18354104	0x3d65e306	0x16050000	11SCT2L460	N4_N9	AEP	EUA
KDL-46EX720	P18354104	0x3d65e306	0x16050000	LTY460HJ0501	N4_N9	AEP	EUA
KDL-46EX720	P18354102	0x3d65e31e	0x03050000	T460HW08 V2	N4_N9	AEP	EUA
KDL-46EX720	P18358800	0x3d65e31e	0x0d050000	T460HW08 V2	N4_N9	AEP-MHP	EIA
KDL-46EX720	P18354100	0x3d65e31e	0x16050000	T460HW08 V2	N4_N9	AEP	EUA
KDL-46EX720	P18354104	0x3d65e31e	0x16050000	T460HW08 V2	N4_N9	AEP	EUA
KDL-46EX720	P18354102	0x3d65e352	0x03050000	V460H1-LE5	N4_N9	AEP	EUA
KDL-46EX720	P18358800	0x3d65e352	0x0d050000	V460H1-LE5	N4_N9	AEP-MHP	EIA
KDL-46EX720	P18354100	0x3d65e352	0x16050000	V460H1-LE5	N4_N9	AEP	EUA
KDL-46EX720	P18354104	0x3d65e352	0x16050000	V460H1-LE5	N4_N9	AEP	EUA
KDL-46EX721	P18354202	0x3d65e306	0x03140000	11SCT2L460	N5	AEP	EUA
KDL-46EX721	P18354202	0x3d65e306	0x03140000	LTY460HJ0501	N5	AEP	EUA
KDL-46EX721	P18354200	0x3d65e306	0x16140000	11SCT2L460	N5	AEP	EUA
KDL-46EX721	P18354200	0x3d65e306	0x16140000	LTY460HJ0501	N5	AEP	EUA
KDL-46EX721	P18354204	0x3d65e306	0x16140000	11SCT2L460	N5	AEP	EUA
KDL-46EX721	P18354204	0x3d65e306	0x16140000	LTY460HJ0501	N5	AEP	EUA
KDL-46EX721	P18354202	0x3d65e31e	0x03140000	T460HW08 V2	N5	AEP	EUA
KDL-46EX721	P18354200	0x3d65e31e	0x16140000	T460HW08 V2	N5	AEP	EUA
KDL-46EX721	P18354204	0x3d65e31e	0x16140000	T460HW08 V2	N5	AEP	EUA
KDL-46EX721	P18354202	0x3d65e352	0x03140000	V460H1-LE5	N5	AEP	EUA
KDL-46EX721	P18354200	0x3d65e352	0x16140000	V460H1-LE5	N5	AEP	EUA
KDL-46EX721	P18354204	0x3d65e352	0x16140000	V460H1-LE5	N5	AEP	EUA
KDL-46EX723	P18369900	0x3d65e506	0x0c050000	11SCT2L460	N4_N9	AEP-T2	EUA
KDL-46EX723	P18369900	0x3d65e506	0x0c050000	LTY460HJ0501	N4_N9	AEP-T2	EUA
KDL-46EX723	P18369901	0x3d65e506	0x0c050000	11SCT2L460	N4_N9	AEP-T2	EUA
KDL-46EX723	P18369901	0x3d65e506	0x0c050000	LTY460HJ0501	N4_N9	AEP-T2	EUA
KDL-46EX723	P18369900	0x3d65e51e	0x0c050000	T460HW08 V2	N4_N9	AEP-T2	EUA
KDL-46EX723	P18369901	0x3d65e51e	0x0c050000	T460HW08 V2	N4_N9	AEP-T2	EUA
KDL-46EX723	P18369900	0x3d65e552	0x0c050000	V460H1-LE5	N4_N9	AEP-T2	EUA
KDL-46EX723	P18369901	0x3d65e552	0x0c050000	V460H1-LE5	N4_N9	AEP-T2	EUA
KDL-46EX724	P18391200	0x3d65e506	0x0c140000	11SCT2L460	N5	AEP-T2	EUA

Model Name	ProductCode	Model-ID	Product-ID	Panel Name	000 SEG	001 DEST	PKG
KDL-46EX724	P18391200	0x3d65e506	0x0c140000	LTY460HJ0501	N5	AEP-T2	EUA
KDL-46EX724	P18391201	0x3d65e506	0x0c140000	11SCT2L460	N5	AEP-T2	EUA
KDL-46EX724	P18391201	0x3d65e506	0x0c140000	LTY460HJ0501	N5	AEP-T2	EUA
KDL-46EX724	P18391200	0x3d65e51e	0x0c140000	T460HW08 V2	N5	AEP-T2	EUA
KDL-46EX724	P18391201	0x3d65e51e	0x0c140000	T460HW08 V2	N5	AEP-T2	EUA
KDL-46EX724	P18391200	0x3d65e552	0x0c140000	V460H1-LE5	N5	AEP-T2	EUA
KDL-46EX724	P18391201	0x3d65e552	0x0c140000	V460H1-LE5	N5	AEP-T2	EUA
KDL-46EX725	P18364502	0x3d65e406	0x04050000	11SCT2L460	N4_N9	AEP-S	EUA
KDL-46EX725	P18364502	0x3d65e406	0x04050000	LTY460HJ0501	N4_N9	AEP-S	EUA
KDL-46EX725	P18364500	0x3d65e406	0x17050000	11SCT2L460	N4_N9	AEP-S	EUA
KDL-46EX725	P18364500	0x3d65e406	0x17050000	LTY460HJ0501	N4_N9	AEP-S	EUA
KDL-46EX725	P18364504	0x3d65e406	0x17050000	11SCT2L460	N4_N9	AEP-S	EUA
KDL-46EX725	P18364504	0x3d65e406	0x17050000	LTY460HJ0501	N4_N9	AEP-S	EUA
KDL-46EX725	P18364505	0x3d65e406	0x17050000	11SCT2L460	N4_N9	AEP-S	EUA
KDL-46EX725	P18364505	0x3d65e406	0x17050000	LTY460HJ0501	N4_N9	AEP-S	EUA
KDL-46EX725	P18364502	0x3d65e41e	0x04050000	T460HW08 V2	N4_N9	AEP-S	EUA
KDL-46EX725	P18364500	0x3d65e41e	0x17050000	T460HW08 V2	N4_N9	AEP-S	EUA
KDL-46EX725	P18364504	0x3d65e41e	0x17050000	T460HW08 V2	N4_N9	AEP-S	EUA
KDL-46EX725	P18364505	0x3d65e41e	0x17050000	T460HW08 V2	N4_N9	AEP-S	EUA
KDL-46EX725	P18364502	0x3d65e452	0x04050000	V460H1-LE5	N4_N9	AEP-S	EUA
KDL-46EX725	P18364500	0x3d65e452	0x17050000	V460H1-LE5	N4_N9	AEP-S	EUA
KDL-46EX725	P18364504	0x3d65e452	0x17050000	V460H1-LE5	N4_N9	AEP-S	EUA
KDL-46EX726	P18364702	0x3d65e406	0x04140000	11SCT2L460	N5	AEP-S	EUA
KDL-46EX726	P18364702	0x3d65e406	0x04140000	LTY460HJ0501	N5	AEP-S	EUA
KDL-46EX726	P18364700	0x3d65e406	0x17140000	11SCT2L460	N5	AEP-S	EUA
KDL-46EX726	P18364700	0x3d65e406	0x17140000	LTY460HJ0501	N5	AEP-S	EUA
KDL-46EX726	P18364704	0x3d65e406	0x17140000	11SCT2L460	N5	AEP-S	EUA
KDL-46EX726	P18364704	0x3d65e406	0x17140000	LTY460HJ0501	N5	AEP-S	EUA
KDL-46EX726	P18364702	0x3d65e41e	0x04140000	T460HW08 V2	N5	AEP-S	EUA
KDL-46EX726	P18364700	0x3d65e41e	0x17140000	T460HW08 V2	N5	AEP-S	EUA
KDL-46EX726	P18364704	0x3d65e41e	0x17140000	T460HW08 V2	N5	AEP-S	EUA
KDL-46EX726	P18364702	0x3d65e452	0x04140000	V460H1-LE5	N5	AEP-S	EUA
KDL-46EX726	P18364700	0x3d65e452	0x17140000	V460H1-LE5	N5	AEP-S	EUA
KDL-46EX726	P18364704	0x3d65e452	0x17140000	V460H1-LE5	N5	AEP-S	EUA
KDL-46EX727	P18364800	0x3d65e406	0x04140000	11SCT2L460	N5	AEP-S	EUA
KDL-46EX727	P18364800	0x3d65e406	0x04140000	LTY460HJ0501	N5	AEP-S	EUA
KDL-46EX727	P18364800	0x3d65e41e	0x04140000	T460HW08 V2	N5	AEP-S	EUA
KDL-46EX727	P18364800	0x3d65e452	0x04140000	V460H1-LE5	N5	AEP-S	EUA
KDL-46EX728	P18410500	0x3d65e406	0x04140000	11SCT2L460	N5	AEP-S	EUA
KDL-46EX728	P18410500	0x3d65e406	0x04140000	LTY460HJ0501	N5	AEP-S	EUA

**Note: PKG Information EUA=All Europe (Except Italy) / EIA= Italy Only**



## Appendix 1 - Model ID / Product ID and Panel Information

Model Name	ProductCode	Model-ID	Product-ID	Panel Name	000 SEG	001 DEST	PKG
KDL-46EX728	P18410500	0x3d65e41e	0x04140000	T460HW08 V2	N5	AEP-S	EUA
KDL-46EX728	P18410500	0x3d65e452	0x04140000	V460H1-LE5	N5	AEP-S	EUA
KDL-46EX729	P18410600	0x3d65e406	0x04140000	11SCT2L460	N5	AEP-S	EUA
KDL-46EX729	P18410600	0x3d65e406	0x04140000	LTY460HJ0501	N5	AEP-S	EUA
KDL-46EX729	P18410600	0x3d65e41e	0x04140000	T460HW08 V2	N5	AEP-S	EUA
KDL-46EX729	P18410600	0x3d65e452	0x04140000	V460H1-LE5	N5	AEP-S	EUA
KDL-46HX720	P18352700	0x5d45e311	0x03160000	LTY460HQ0401	Y3	AEP	EUA
KDL-46HX723	P18369100	0x5d45e511	0x0c160000	LTY460HQ0401	Y3	AEP-T2	EUA
KDL-46HX723	P18369101	0x5d45e511	0x0c160000	LTY460HQ0401	Y3	AEP-T2	EUA
KDL-46HX725	P18362200	0x5d45e411	0x04160000	LTY460HQ0401	Y3	AEP-S	EUA
KDL-46HX725	P18362205	0x5d45e411	0x04160000	LTY460HQ0401	Y3	AEP-S	EUA
KDL-46HX820	P18352500	0x6d25e30c	0x03030000	FQLL460LT0101	Y2	AEP	EUA
KDL-46HX820	P18357700	0x6d25e30c	0x0d030000	FQLL460LT0101	Y2	AEP-MHP	EIA
KDL-46HX823	P18368900	0x6d25e50c	0x0c030000	FQLL460LT0101	Y2	AEP-T2	EUA
KDL-46HX823	P18368901	0x6d25e50c	0x0c030000	FQLL460LT0101	Y2	AEP-T2	EUA
KDL-46HX825	P18362000	0x6d25e40c	0x04030000	FQLL460LT0101	Y2	AEP-S	EUA
KDL-46HX825	P18362005	0x6d25e40c	0x04030000	FQLL460LT0101	Y2	AEP-S	EUA
KDL-46HX920	P18352300	0x6d25e309	0x03020000	FQLF460DT0101	Y1	AEP	EUA
KDL-46HX920	P18407703	0x6d25e309	0x03020000	FQLF460DT0101	Y1	AEP	EUA
KDL-46HX920	P18357500	0x6d25e309	0x0d020000	FQLF460DT0101	Y1	AEP-MHP	EIA
KDL-46HX923	P18368700	0x6d25e509	0x0c020000	FQLF460DT0101	Y1	AEP-T2	EUA
KDL-46HX923	P18368701	0x6d25e509	0x0c020000	FQLF460DT0101	Y1	AEP-T2	EUA
KDL-46HX925	P18361800	0x6d25e409	0x04020000	FQLF460DT0101	Y1	AEP-S	EUA
KDL-46HX925	P18361805	0x6d25e409	0x04020000	FQLF460DT0101	Y1	AEP-S	EUA
KDL-46NX720	P18353200	0x4d55e303	0x03040000	11SCT2L460LD	N1	AEP	EUA
KDL-46NX720	P18353200	0x4d55e303	0x03040000	LTW460HJ0201	N1	AEP	EUA
KDL-46NX720	P18407903	0x4d55e303	0x03040000	11SCT2L460LD	N1	AEP	EUA
KDL-46NX720	P18407903	0x4d55e303	0x03040000	LTW460HJ0201	N1	AEP	EUA
KDL-46NX720	P18407903	0x4d55e303	0x03040000	11SCT2L460LD	N1	AEP-MHP	EIA
KDL-46NX720	P18407903	0x4d55e303	0x03040000	LTW460HJ0201	N1	AEP-MHP	EIA
KDL-46NX720	P18358300	0x4d55e303	0x0d040000	11SCT2L460LD	N1	AEP-MHP	EIA
KDL-46NX720	P18358300	0x4d55e303	0x0d040000	LTW460HJ0201	N1	AEP-MHP	EIA
KDL-46NX720	P18353200	0x4d55e305	0x03040000	11SCT2M460LD	N1	AEP	EUA
KDL-46NX720	P18353200	0x4d55e305	0x03040000	V460H1-PE5	N1	AEP	EUA
KDL-46NX720	P18353200	0x4d55e305	0x03040000	FDMY460LT0101	N1	AEP	EUA
KDL-46NX720	P18407903	0x4d55e305	0x03040000	11SCT2M460LD	N1	AEP	EUA
KDL-46NX720	P18407903	0x4d55e305	0x03040000	V460H1-PE5	N1	AEP	EUA
KDL-46NX720	P18407903	0x4d55e305	0x03040000	FDMY460LT0101	N1	AEP	EUA
KDL-46NX720	P18358300	0x4d55e305	0x0d040000	11SCT2M460LD	N1	AEP-MHP	EIA
KDL-46NX720	P18358300	0x4d55e305	0x0d040000	V460H1-PE5	N1	AEP-MHP	EIA
KDL-46NX720	P18358300	0x4d55e305	0x0d040000	FDMY460LT0101	N1	AEP-MHP	EIA
KDL-46NX721	P18427400	0x4d55e303	0x03040000	11SCT2L460LD	N1	AEP	EUA
KDL-46NX721	P18427400	0x4d55e303	0x03040000	LTW460HJ0201	N1	AEP	EUA

Model Name	ProductCode	Model-ID	Product-ID	Panel Name	000 SEG	001 DEST	PKG
KDL-46NX721	P18428000	0x4d55e303	0x0d040000	11SCT2L460LD	N1	AEP-MHP	EIA
KDL-46NX721	P18428000	0x4d55e303	0x0d040000	LTW460HJ0201	N1	AEP-MHP	EIA
KDL-46NX721	P18427400	0x4d55e305	0x03040000	11SCT2M460LD	N1	AEP	EUA
KDL-46NX721	P18427400	0x4d55e305	0x03040000	V460H1-PE5	N1	AEP	EUA
KDL-46NX721	P18427400	0x4d55e305	0x03040000	FDMY460LT0101	N1	AEP	EUA
KDL-46NX721	P18428000	0x4d55e305	0x0d040000	11SCT2M460LD	N1	AEP-MHP	EIA
KDL-46NX721	P18428000	0x4d55e305	0x0d040000	V460H1-PE5	N1	AEP-MHP	EIA
KDL-46NX721	P18428000	0x4d55e305	0x0d040000	FDMY460LT0101	N1	AEP-MHP	EIA
KDL-46NX722	P18428400	0x4d55e303	0x03040000	11SCT2L460LD	N1	AEP	EUA
KDL-46NX722	P18428400	0x4d55e303	0x03040000	LTW460HJ0201	N1	AEP	EUA
KDL-46NX722	P18428500	0x4d55e303	0x0d040000	11SCT2L460LD	N1	AEP-MHP	EIA
KDL-46NX722	P18428500	0x4d55e303	0x0d040000	LTW460HJ0201	N1	AEP-MHP	EIA
KDL-46NX722	P18428400	0x4d55e305	0x03040000	11SCT2M460LD	N1	AEP	EUA
KDL-46NX722	P18428400	0x4d55e305	0x03040000	V460H1-PE5	N1	AEP	EUA
KDL-46NX722	P18428400	0x4d55e305	0x03040000	FDMY460LT0101	N1	AEP	EUA
KDL-46NX722	P18428500	0x4d55e305	0x0d040000	11SCT2M460LD	N1	AEP-MHP	EIA
KDL-46NX722	P18428500	0x4d55e305	0x0d040000	V460H1-PE5	N1	AEP-MHP	EIA
KDL-46NX722	P18428500	0x4d55e305	0x0d040000	FDMY460LT0101	N1	AEP-MHP	EIA
KDL-46NX723	P18369500	0x4d55e503	0x0c040000	11SCT2L460LD	N1	AEP-T2	EUA
KDL-46NX723	P18369500	0x4d55e503	0x0c040000	LTW460HJ0201	N1	AEP-T2	EUA
KDL-46NX723	P18369501	0x4d55e503	0x0c040000	11SCT2L460LD	N1	AEP-T2	EUA
KDL-46NX723	P18369501	0x4d55e503	0x0c040000	LTW460HJ0201	N1	AEP-T2	EUA
KDL-46NX723	P18369500	0x4d55e505	0x0c040000	11SCT2M460LD	N1	AEP-T2	EUA
KDL-46NX723	P18369500	0x4d55e505	0x0c040000	V460H1-PE5	N1	AEP-T2	EUA
KDL-46NX723	P18369500	0x4d55e505	0x0c040000	FDMY460LT0101	N1	AEP-T2	EUA
KDL-46NX723	P18369501	0x4d55e505	0x0c040000	11SCT2M460LD	N1	AEP-T2	EUA
KDL-46NX723	P18369501	0x4d55e505	0x0c040000	V460H1-PE5	N1	AEP-T2	EUA
KDL-46NX723	P18369501	0x4d55e505	0x0c040000	FDMY460LT0101	N1	AEP-T2	EUA
KDL-46NX725	P18362900	0x4d55e403	0x04040000	11SCT2L460LD	N1	AEP-S	EUA
KDL-46NX725	P18362900	0x4d55e403	0x04040000	LTW460HJ0201	N1	AEP-S	EUA
KDL-46NX725	P18362905	0x4d55e403	0x04040000	11SCT2L460LD	N1	AEP-S	EUA
KDL-46NX725	P18362905	0x4d55e403	0x04040000	LTW460HJ0201	N1	AEP-S	EUA
KDL-46NX725	P18362900	0x4d55e405	0x04040000	11SCT2M460LD	N1	AEP-S	EUA
KDL-46NX725	P18362900	0x4d55e405	0x04040000	V460H1-PE5	N1	AEP-S	EUA
KDL-46NX725	P18362900	0x4d55e405	0x04040000	FDMY460LT0101	N1	AEP-S	EUA
KDL-46NX725	P18362905	0x4d55e405	0x04040000	11SCT2M460LD	N1	AEP-S	EUA
KDL-46NX725	P18362905	0x4d55e405	0x04040000	V460H1-PE5	N1	AEP-S	EUA
KDL-46NX725	P18362905	0x4d55e405	0x04040000	FDMY460LT0101	N1	AEP-S	EUA
KDL-46NX726	P18427700	0x4d55e403	0x04040000	11SCT2L460LD	N1	AEP-S	EUA
KDL-46NX726	P18427700	0x4d55e403	0x04040000	LTW460HJ0201	N1	AEP-S	EUA
KDL-46NX726	P18427700	0x4d55e405	0x04040000	11SCT2M460LD	N1	AEP-S	EUA

**Note: PKG Information EUA=All Europe (Except Italy) / EIA= Italy Only**

## Appendix 1 - Model ID / Product ID and Panel Information

Model Name	ProductCode	Model-ID	Product-ID	Panel Name	000 SEG	001 DEST	PKG
KDL-46NX726	P18427700	0x4d55e405	0x04040000	V460H1-PE5	N1	AEP-S	EUA
KDL-46NX726	P18427700	0x4d55e405	0x04040000	FDMY460LT0101	N1	AEP-S	EUA
KDL-46NX727	P18428600	0x4d55e403	0x04040000	11SCT2L460LD	N1	AEP-S	EUA
KDL-46NX727	P18428600	0x4d55e403	0x04040000	LTW460HJ0201	N1	AEP-S	EUA
KDL-46NX727	P18428600	0x4d55e405	0x04040000	11SCT2M460LD	N1	AEP-S	EUA
KDL-46NX727	P18428600	0x4d55e405	0x04040000	V460H1-PE5	N1	AEP-S	EUA
KDL-46NX727	P18428600	0x4d55e405	0x04040000	FDMY460LT0101	N1	AEP-S	EUA
KDL-55EX720	P18353902	0x3d65e31c	0x03050000	LTY550HJ0301	N4_N9	AEP	EUA
KDL-55EX720	P18358700	0x3d65e31c	0x0d050000	LTY550HJ0301	N4_N9	AEP-MHP	EIA
KDL-55EX720	P18353900	0x3d65e31c	0x16050000	LTY550HJ0301	N4_N9	AEP	EUA
KDL-55EX720	P18353904	0x3d65e31c	0x16050000	LTY550HJ0301	N4_N9	AEP	EUA
KDL-55EX720	P18353920	0x3d65e31c	0x16050000	LTY550HJ0301	N4_N9	AEP	EUA
KDL-55EX720	P18353902	0x3d65e31d	0x03050000	T546HW04 V1	N4_N9	AEP	EUA
KDL-55EX720	P18358700	0x3d65e31d	0x0d050000	T546HW04 V1	N4_N9	AEP-MHP	EIA
KDL-55EX720	P18353900	0x3d65e31d	0x16050000	T546HW04 V1	N4_N9	AEP	EUA
KDL-55EX720	P18353904	0x3d65e31d	0x16050000	T546HW04 V1	N4_N9	AEP	EUA
KDL-55EX720	P18353920	0x3d65e31d	0x16050000	T546HW04 V1	N4_N9	AEP	EUA
KDL-55EX721	P18409400	0x3d65e31c	0x16140000	LTY550HJ0301	N5	AEP	EUA
KDL-55EX721	P18409404	0x3d65e31c	0x16140000	LTY550HJ0301	N5	AEP	EUA
KDL-55EX721	P18409400	0x3d65e31d	0x16140000	T546HW04 V1	N5	AEP	EUA
KDL-55EX721	P18409404	0x3d65e31d	0x16140000	T546HW04 V1	N5	AEP	EUA
KDL-55EX723	P18369800	0x3d65e51c	0x0c050000	LTY550HJ0301	N4_N9	AEP-T2	EUA
KDL-55EX723	P18369801	0x3d65e51c	0x0c050000	LTY550HJ0301	N4_N9	AEP-T2	EUA
KDL-55EX723	P18369800	0x3d65e51d	0x0c050000	T546HW04 V1	N4_N9	AEP-T2	EUA
KDL-55EX723	P18369801	0x3d65e51d	0x0c050000	T546HW04 V1	N4_N9	AEP-T2	EUA
KDL-55EX725	P18364102	0x3d65e41c	0x04050000	LTY550HJ0301	N4_N9	AEP-S	EUA
KDL-55EX725	P18364100	0x3d65e41c	0x17050000	LTY550HJ0301	N4_N9	AEP-S	EUA
KDL-55EX725	P18364104	0x3d65e41c	0x17050000	LTY550HJ0301	N4_N9	AEP-S	EUA
KDL-55EX725	P18364105	0x3d65e41c	0x17050000	LTY550HJ0301	N4_N9	AEP-S	EUA
KDL-55EX725	P18364102	0x3d65e41d	0x04050000	T546HW04 V1	N4_N9	AEP-S	EUA
KDL-55EX725	P18364100	0x3d65e41d	0x17050000	T546HW04 V1	N4_N9	AEP-S	EUA
KDL-55EX725	P18364104	0x3d65e41d	0x17050000	T546HW04 V1	N4_N9	AEP-S	EUA
KDL-55EX725	P18364105	0x3d65e41d	0x17050000	T546HW04 V1	N4_N9	AEP-S	EUA
KDL-55HX820	P18352400	0x6d25e30b	0x03030000	FQLL550LT0101	Y2	AEP	EUA
KDL-55HX820	P18357600	0x6d25e30b	0x0d030000	FQLL550LT0101	Y2	AEP-MHP	EIA
KDL-55HX823	P18368800	0x6d25e50b	0x0c030000	FQLL550LT0101	Y2	AEP-T2	EUA
KDL-55HX823	P18368801	0x6d25e50b	0x0c030000	FQLL550LT0101	Y2	AEP-T2	EUA
KDL-55HX825	P18361900	0x6d25e40b	0x04030000	FQLL550LT0101	Y2	AEP-S	EUA
KDL-55HX825	P18361905	0x6d25e40b	0x04030000	FQLL550LT0101	Y2	AEP-S	EUA
KDL-55HX920	P18352200	0x6d25e308	0x03020000	FQLF550DT0101	Y1	AEP	EUA
KDL-55HX920	P18407603	0x6d25e308	0x03020000	FQLF550DT0101	Y1	AEP	EUA

Model Name	ProductCode	Model-ID	Product-ID	Panel Name	000 SEG	001 DEST	PKG
KDL-55HX920	P18357400	0x6d25e308	0x0d020000	FQLF550DT0101	Y1	AEP-MHP	EIA
KDL-55HX923	P18368600	0x6d25e508	0x0c020000	FQLF550DT0101	Y1	AEP-T2	EUA
KDL-55HX923	P18368601	0x6d25e508	0x0c020000	FQLF550DT0101	Y1	AEP-T2	EUA
KDL-55HX925	P18361700	0x6d25e408	0x04020000	FQLF550DT0101	Y1	AEP-S	EUA
KDL-55HX925	P18361705	0x6d25e408	0x04020000	FQLF550DT0101	Y1	AEP-S	EUA
KDL-55NX720	P18353000	0x4d55e314	0x03040000	LTW550HJ0101	N1	AEP	EUA
KDL-55NX720	P18353000	0x4d55e314	0x03040000	FDLL550LT0101	N1	AEP	EUA
KDL-55NX720	P18407803	0x4d55e314	0x03040000	LTW550HJ0101	N1	AEP	EUA
KDL-55NX720	P18407803	0x4d55e314	0x03040000	FDLL550LT0101	N1	AEP	EUA
KDL-55NX720	P18358200	0x4d55e314	0x0d040000	LTW550HJ0101	N1	AEP-MHP	EIA
KDL-55NX720	P18358200	0x4d55e314	0x0d040000	FDLL550LT0101	N1	AEP-MHP	EIA
KDL-55NX720	P18353000	0x4d55e315	0x03040000	V546H1-PE3	N1	AEP	EUA
KDL-55NX720	P18407803	0x4d55e315	0x03040000	V546H1-PE3	N1	AEP	EUA
KDL-55NX720	P18358200	0x4d55e315	0x0d040000	V546H1-PE3	N1	AEP-MHP	EIA
KDL-55NX721	P18427300	0x4d55e314	0x03040000	LTW550HJ0101	N1	AEP	EUA
KDL-55NX721	P18427300	0x4d55e314	0x03040000	FDLL550LT0101	N1	AEP	EUA
KDL-55NX721	P18427300	0x4d55e315	0x03040000	V546H1-PE3	N1	AEP	EUA
KDL-55NX722	P18428700	0x4d55e314	0x03040000	LTW550HJ0101	N1	AEP	EUA
KDL-55NX722	P18428700	0x4d55e314	0x03040000	FDLL550LT0101	N1	AEP	EUA
KDL-55NX722	P18428700	0x4d55e315	0x03040000	V546H1-PE3	N1	AEP	EUA
KDL-55NX723	P18369400	0x4d55e514	0x0c040000	LTW550HJ0101	N1	AEP-T2	EUA
KDL-55NX723	P18369400	0x4d55e514	0x0c040000	FDLL550LT0101	N1	AEP-T2	EUA
KDL-55NX723	P18369401	0x4d55e514	0x0c040000	LTW550HJ0101	N1	AEP-T2	EUA
KDL-55NX723	P18369401	0x4d55e514	0x0c040000	FDLL550LT0101	N1	AEP-T2	EUA
KDL-55NX723	P18369400	0x4d55e515	0x0c040000	V546H1-PE3	N1	AEP-T2	EUA
KDL-55NX723	P18369401	0x4d55e515	0x0c040000	V546H1-PE3	N1	AEP-T2	EUA
KDL-55NX725	P18362500	0x4d55e414	0x04040000	LTW550HJ0101	N1	AEP-S	EUA
KDL-55NX725	P18362500	0x4d55e414	0x04040000	FDLL550LT0101	N1	AEP-S	EUA
KDL-55NX725	P18362505	0x4d55e414	0x04040000	LTW550HJ0101	N1	AEP-S	EUA
KDL-55NX725	P18362505	0x4d55e414	0x04040000	FDLL550LT0101	N1	AEP-S	EUA
KDL-55NX725	P18362500	0x4d55e415	0x04040000	V546H1-PE3	N1	AEP-S	EUA
KDL-55NX725	P18362505	0x4d55e415	0x04040000	V546H1-PE3	N1	AEP-S	EUA
KDL-55NX726	P18427600	0x4d55e414	0x04040000	LTW550HJ0101	N1	AEP-S	EUA
KDL-55NX726	P18427600	0x4d55e414	0x04040000	FDLL550LT0101	N1	AEP-S	EUA
KDL-55NX726	P18427600	0x4d55e415	0x04040000	V546H1-PE3	N1	AEP-S	EUA
KDL-55NX727	P18428800	0x4d55e414	0x04040000	LTW550HJ0101	N1	AEP-S	EUA
KDL-55NX727	P18428800	0x4d55e414	0x04040000	FDLL550LT0101	N1	AEP-S	EUA
KDL-55NX727	P18428800	0x4d55e415	0x04040000	V546H1-PE3	N1	AEP-S	EUA
KDL-60NX720	P18352900	0x4d55e304	0x03040000	11SCT2H600LD	N1	AEP	EUA
KDL-60NX720	P18352900	0x4d55e304	0x03040000	FDHY600LT0101	N1	AEP	EUA
KDL-60NX720	P18352920	0x4d55e304	0x03040000	11SCT2H600LD	N1	AEP	EUA

**Note: PKG Information EUA=All Europe (Except Italy) / EIA= Italy Only**

## Appendix 1 - Model ID / Product ID and Panel Information

Model Name	ProductCode	Model-ID	Product-ID	Panel Name	000 SEG	001 DEST	PKG
KDL-60NX720	P18352920	0x4d55e304	0x03040000	FDHY600LT0101	N1	AEP	EUA
KDL-60NX720	P18358100	0x4d55e304	0x0d040000	11SCT2H600LD	N1	AEP-MHP	EIA
KDL-60NX720	P18358100	0x4d55e304	0x0d040000	FDHY600LT0101	N1	AEP-MHP	EIA
KDL-60NX723	P18369300	0x4d55e504	0x0c040000	11SCT2H600LD	N1	AEP-T2	EUA
KDL-60NX723	P18369300	0x4d55e504	0x0c040000	FDHY600LT0101	N1	AEP-T2	EUA
KDL-60NX723	P18369301	0x4d55e504	0x0c040000	11SCT2H600LD	N1	AEP-T2	EUA
KDL-60NX723	P18369301	0x4d55e504	0x0c040000	FDHY600LT0101	N1	AEP-T2	EUA
KDL-60NX725	P18362400	0x4d55e404	0x04040000	11SCT2H600LD	N1	AEP-S	EUA
KDL-60NX725	P18362400	0x4d55e404	0x04040000	FDHY600LT0101	N1	AEP-S	EUA
KDL-60NX725	P18362405	0x4d55e404	0x04040000	11SCT2H600LD	N1	AEP-S	EUA
KDL-60NX725	P18362405	0x4d55e404	0x04040000	FDHY600LT0101	N1	AEP-S	EUA
KDL-65HX920	P18352100	0x5d25e307	0x03020000	V645H1-PE1	Y1	AEP	EUA
KDL-65HX920	P18407503	0x5d25e307	0x03020000	V645H1-PE1	Y1	AEP	EUA
KDL-65HX920	P18352120	0x5d25e307	0x03020000	V645H1-PE1	Y1	AEP	EUA
KDL-65HX920	P18357300	0x5d25e307	0x0d020000	V645H1-PE1	Y1	AEP-MHP	EIA
KDL-65HX923	P18368500	0x5d25e507	0x0c020000	V645H1-PE1	Y1	AEP-T2	EUA
KDL-65HX923	P18368501	0x5d25e507	0x0c020000	V645H1-PE1	Y1	AEP-T2	EUA
KDL-65HX925	P18361600	0x5d25e407	0x04020000	V645H1-PE1	Y1	AEP-S	EUA
KDL-65HX925	P18361605	0x5d25e407	0x04020000	V645H1-PE1	Y1	AEP-S	EUA

**Note: PKG Information EUA=All Europe (Except Italy) / EIA= Italy Only**

## Appendix 2 - FY11 New Destination Code Summary in EX72x

- "AEP" destination of the following models will be divided into "AEP" and "N".
- No change in "UK"/"I"/"RU" destination.

Destination	AEP Original model (For all Pan EU)		AEP after running change (For Pan EU excl. Nordic)	N (Only for Nordic Countries)
Model	40/46/55 EX720 40/46/55 EX721 40/46/55 EX725 40/46 EX726		40/46/55 EX720 40/46/55 EX721 40/46/55 EX725 40/46 EX726	40/46/55 EX720 40/46 EX721 40/46/55 EX725 40/46 EX726
Spec code (Only for internal use)	CEI		CEI	NOR
SAP Model Name Example	KDL-40EX720AEP		KDL-40EX720AEP <b>(Not changed)</b>	KDL-40EX720N
Language (OSD/i-Manual)	Pan-European languages (27 Languages*1)		Pan-European languages <b>minus Nordic 4 languages</b> (23 Languages)	Pan-European languages (27 Languages*1)
Language (Paper Manual in EX720)	Pan-European languages (18 Languages*2)		Pan-European languages <b>minus Nordic 4 languages</b> (14 Languages)	<b>Nordic 4 Languages</b>
Country Setting	All European countries (32 Countries*3)		All European countries <b>minus Nordic 4 countries</b> (28 countries)	All European countries (32 Countries)
Schedule (Ex-factory)	Until E/March-B/Apr, 2011		<b>From E/Mar-B/Apr, 2011</b>	<b>From E/Mar-B/Apr, 2011</b>